



1 2 3 4 5 6 7 8

A

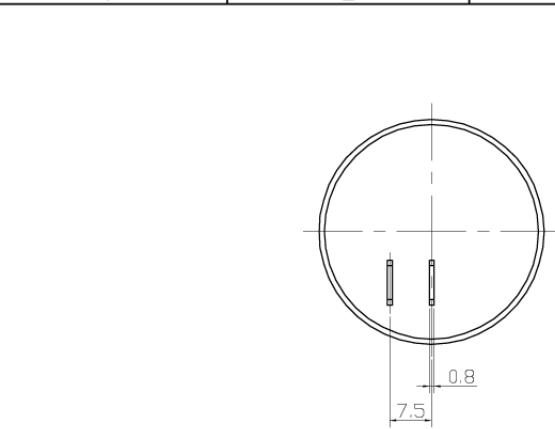

B

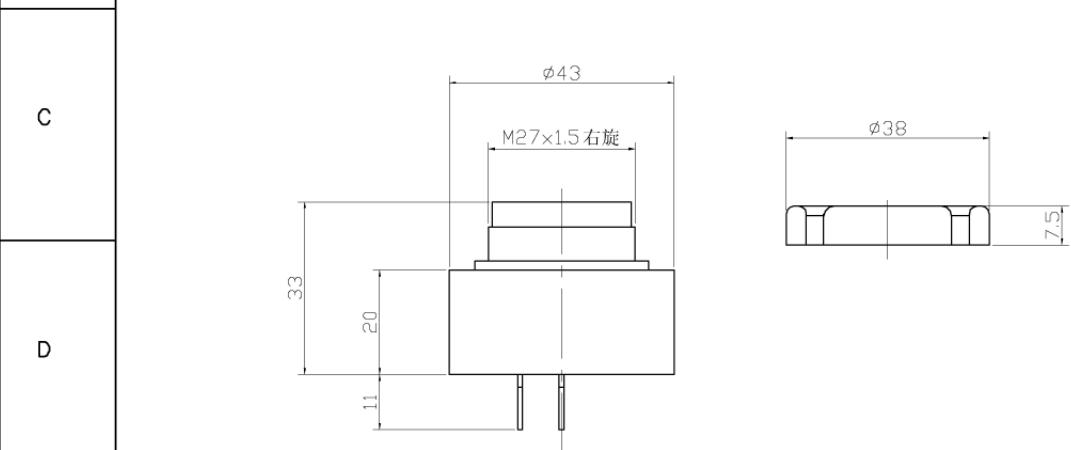

C

D

E

F

SPECIFICATION

- 1.Rated Voltage 12VDC
- 2.Operating Voltage 6~28VDC
- 3.Max.Rated Current 20mA at 12VDC
- 4.Min.Sound Pressure Level 80dB at 12VDC/60cm
- 5.Tone Nature Slow pulse
- 6.Resonant Frequency 2.9±0.5KHz
- 7.Case Material PC
- 8.Operating Temperature -20~+80°C
- 9.Store Temperature -30~+100°C
- 10.Weight 40g

<i>KEPO</i> KEPO ELECTRONIC CO., LTD. http://www.kepo.com.tw			
Piezo Buzzer KPI-4311			
No.	DESCRIPTION	APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE	APPROVALS	DATE	
X XX XXX 90° FORGED -2° ANGLES -1°	DRAWN	CHECKED	
FIRST ANGLE PROJECTION	APPROVED	05.02.18	SCALE NOT TO SCALE
			SHEET 1.0
			DWG NO KP3.840.117
			UNIT mm

1 2 3 4 5 6 7 8