



ACCORD CO., LTD.

ПРОИЗВОДИТЕЛЬ КЛАВИАТУР

ACCORD производит и предлагает следующие клавиатуры:

- 1) Стандартные клавиатуры: влагозащищённые, металлические, телефонные, для систем контроля доступа.
- 2) Клавиатуры изготовленные под требование заказчика и клавиатуры для специальных применений.
- 3) Клавиатуры с подсветкой.
- 4) Силиконовые клавиатуры.

Accord является лидером в производстве клавиатур.

Более трех десятилетий **Accord** стремимся предоставлять клиентам универсальные решения как для уникальных, так и для стандартных моделей клавиатур. На производстве **Accord** реализован полный цикл от прототипирования до серийного производства. Начиная с проектирования, изготовления пресс-форм и заканчивая окончательной сборкой, автоматизированное производство **Accord** обеспечивает выполнение заказов в кратчайшие сроки и по самым выгодным ценам.



**WATERPROOF
BACKLIGHT**






AK-304-N-SSL-WP-MM-BL

GENERAL SPECIFICATION

- **Contact rating: 20mA, 24VDC**
- **LED Contact rating: $V_{max}=3.8V$, $V_{nom}=3.3V$**
- **Contact resistance: 200 ohm max**
- **Life: 2,000,000 cycles per key**
- **Operating Temperature: $-20^{\circ}C$ to $+60^{\circ}C$**
- **Storage Temperature: $-40^{\circ}C$ to $+65^{\circ}C$**



AK-304-N-SSL-WP-MM-BL

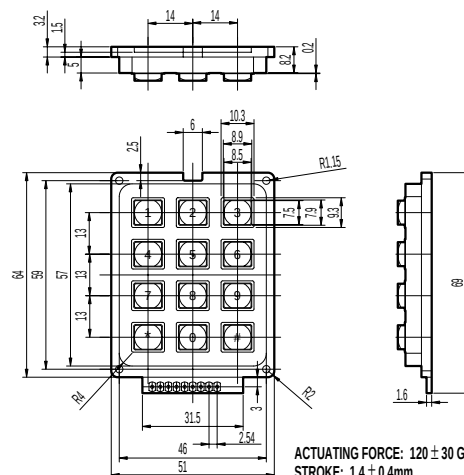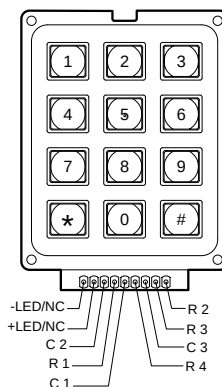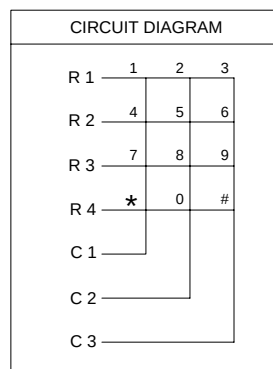

ACTUATING FORCE: 120 ± 30 GRAMS.
STROKE: 1.4 ± 0.4 mm.




AK-1604-N-SSL-WP-MM-BL

GENERAL SPECIFICATION

- **Contact rating: 20mA, 24VDC**
- **LED Contact rating: $V_{max}=3.8V$, $V_{nom}=3.3V$**
- **Contact resistance: 200 ohm max**
- **Life: 2,000,000 cycles per key**
- **Operating Temperature: $-20^{\circ}C$ to $+60^{\circ}C$**
- **Storage Temperature: $-40^{\circ}C$ to $+65^{\circ}C$**



AK-1604-N-SSL-WP-MM-BL

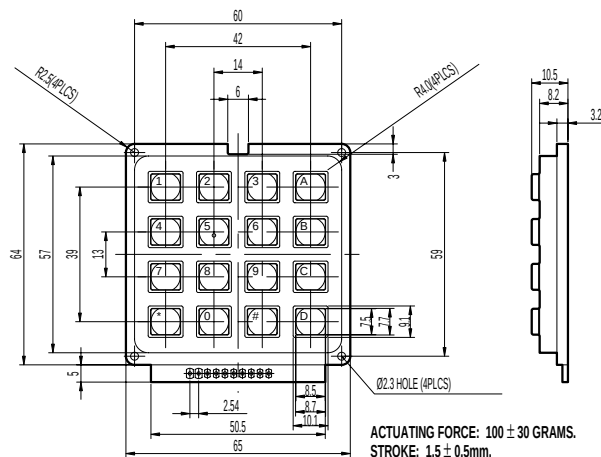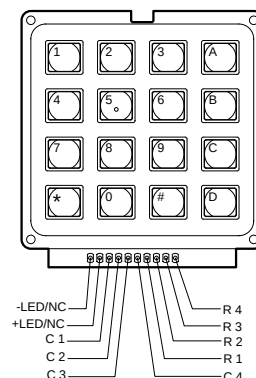


ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.5 ± 0.5 mm.

BACKLIGHTING METAL KEYPAD (WATERPROOF)




AK-207-N-SSL-WP-MM

GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- LED Contact rating: $V_{max}=2.8V$, $V_{nom}=2.1V$
- Contact resistance: 200 ohm max
- Life: 2,000,000 cycles per key
- Operating Temperature: $-20^{\circ}C$ to $+60^{\circ}C$
- Storage Temperature: $-40^{\circ}C$ to $+65^{\circ}C$

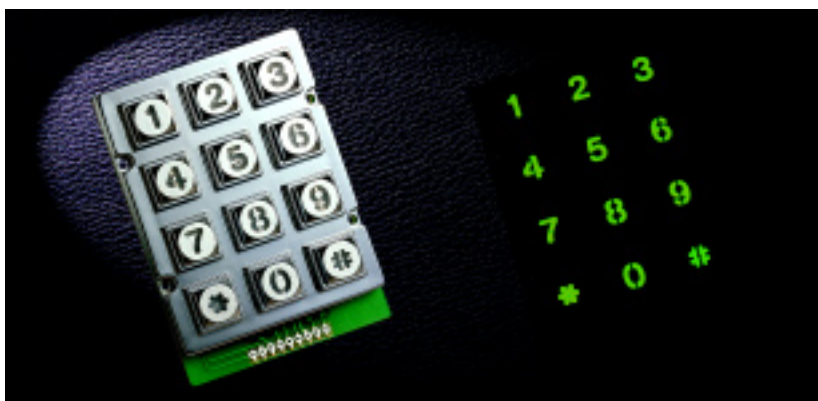


AK-207-N-SSL-WP-MM

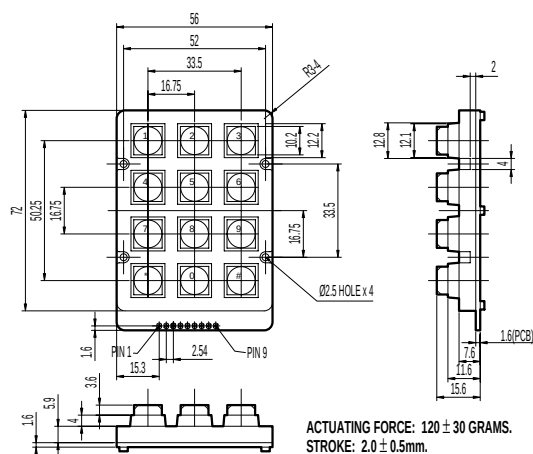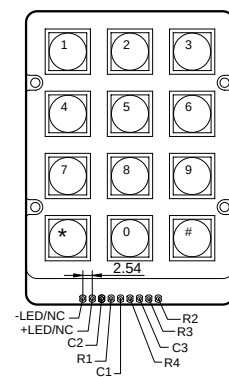




AK-1607-N-SSL-WP-MM

GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- LED Contact rating: $V_{max}=2.8V$, $V_{nom}=2.1V$
- Contact resistance: 200 ohm max
- Life: 2,000,000 cycles per key
- Operating Temperature: $-20^{\circ}C$ to $+60^{\circ}C$
- Storage Temperature: $-40^{\circ}C$ to $+65^{\circ}C$

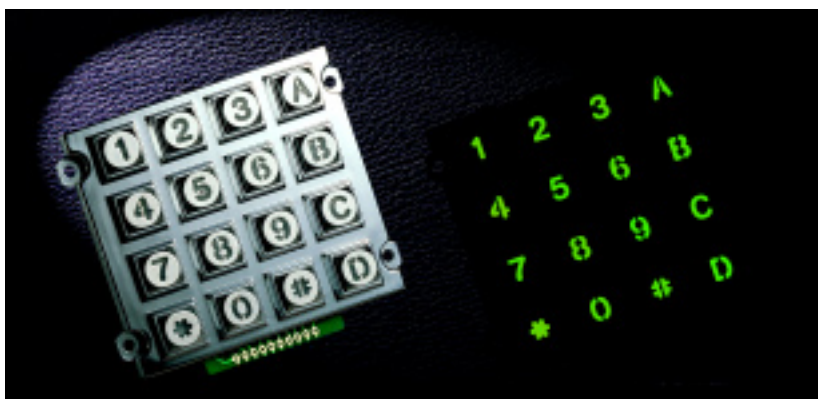

AK-1607-N-SSL-WP-MM

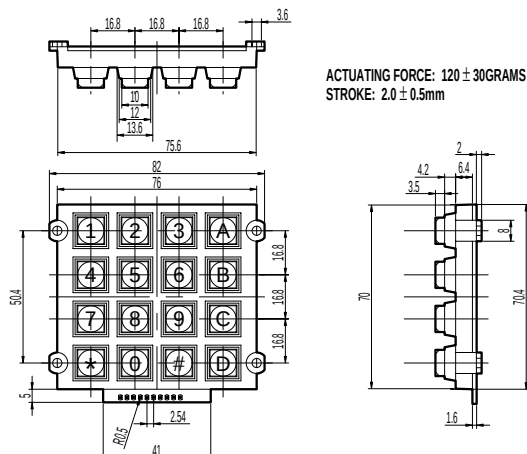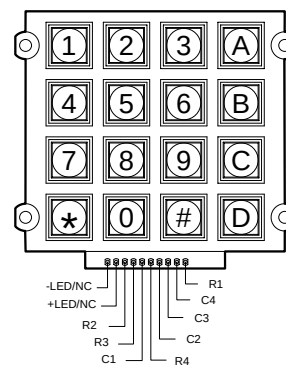

ACCORD PLASTIC KEYPADS



ACCORD SILICONE RUBBER KEYPADS

Accord has over 30 years experience in design, tooling and mass production of Silicone Rubber Keypads. Custom Design is welcome.




TELEPHONE KEYPAD (PLASTIC)



AK-304FM-A-WWB



AK-304FM-N-BBW

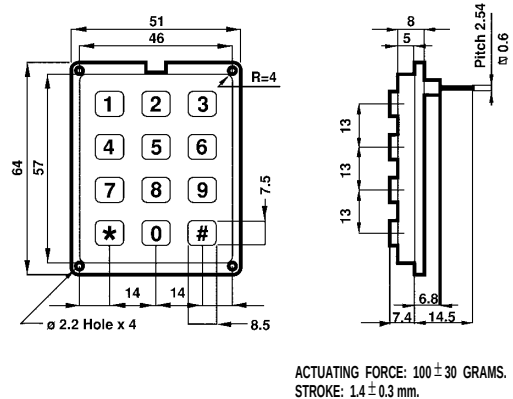


ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.4 ± 0.3 mm.



AK-1604-A-WWB



AK-1604-N-BBW

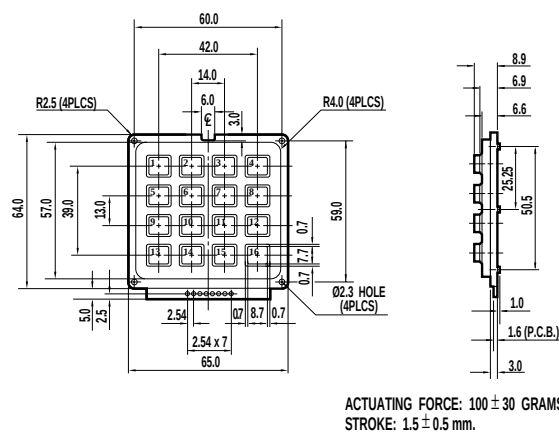


ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.5 ± 0.5 mm.



AK-1607-A-WWB



AK-1607-N-BBW

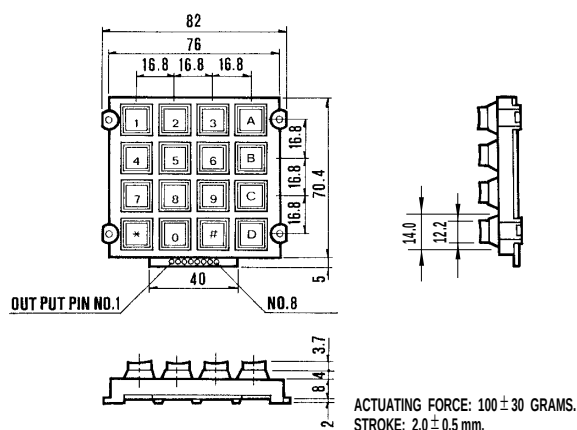


ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 2.0 ± 0.5 mm.

MILITARY METAL KEYPAD (WATERPROOF)



AK-1607-N-BBY-WP-MM

- MEET MILITARY SPECIFICATIONS
- LOW COST
- CUSTOM DESIGN WELCOME
- SEALED AND SUBMERSIBLE

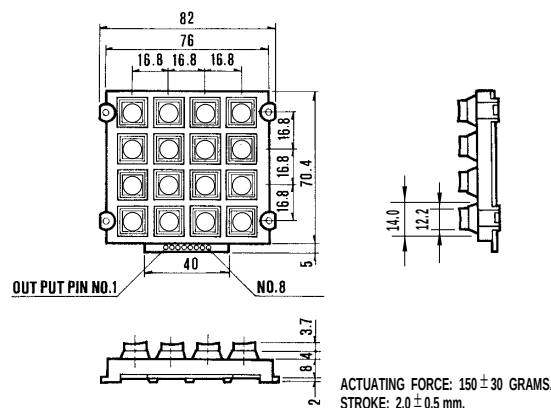

ACTUATING FORCE: 150 ± 30 GRAMS.
STROKE: 2.0 ± 0.5 mm.


TELEPHONE KEYPAD (PLASTIC)



AK-207-A-BBW




AK-207-N-WWB

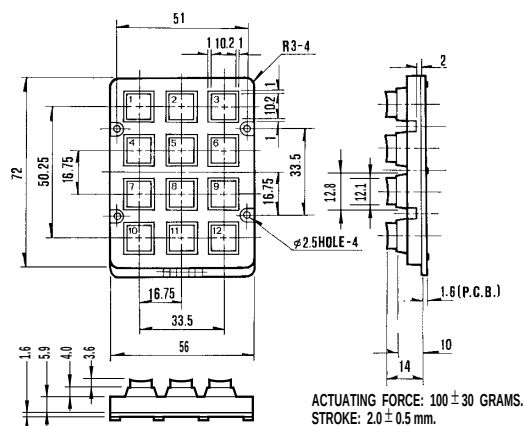

AK-707-A-BBW




AK-707-N-WWB

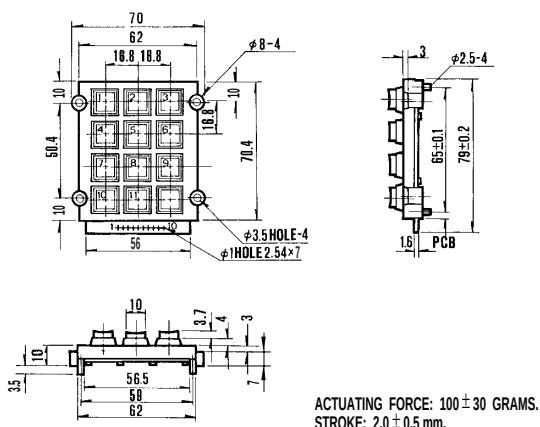

AK-804-A-BBW-BOT




AK-804-N-WWB-BOT

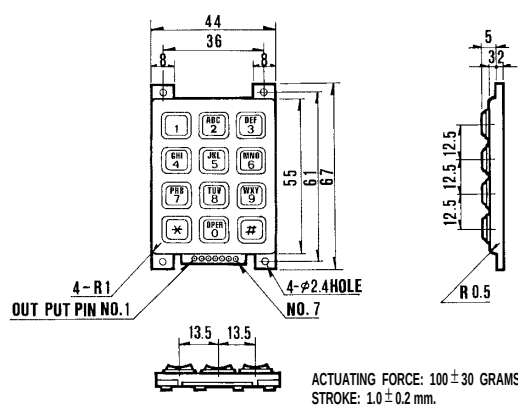

AK-304-A-WWB




AK-304-N-BBW

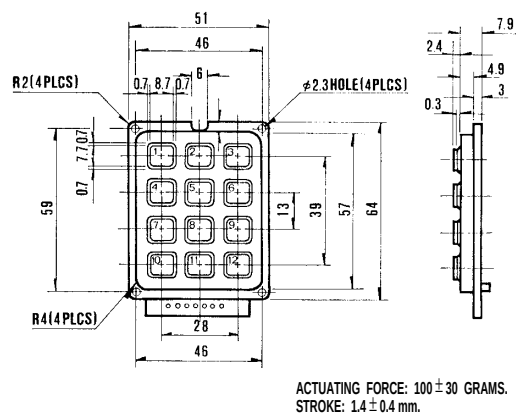


WATERPROOF METAL KEYPAD



AK-1607-A-SSB-WP-MM

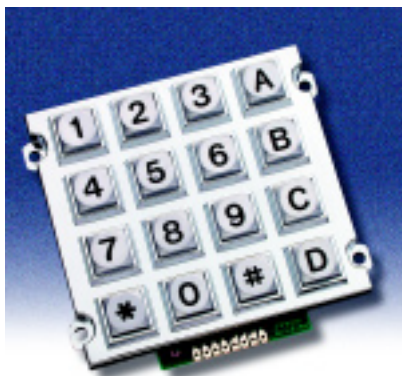


AK-1607-N-SSB-WP-MM

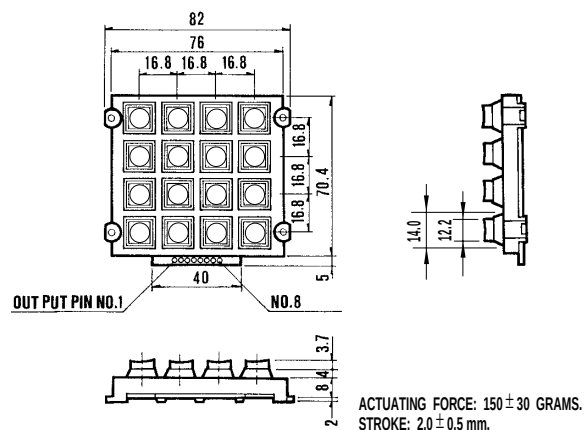

AK-206-N-SSB-WP-MM-CE



AK-206-N-SSB-WP-MM

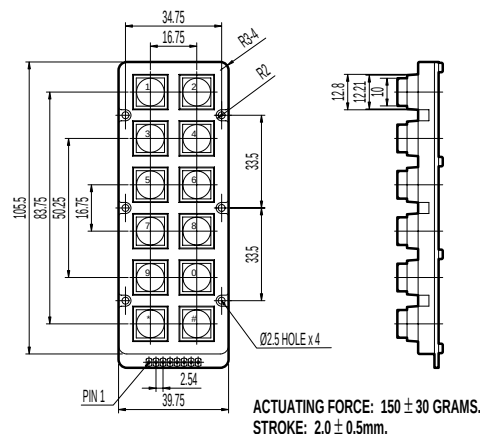


WATERPROOF PLASTIC KEYPAD



AK-207-A-BBW-WP




AK-207-N-WWB-WP

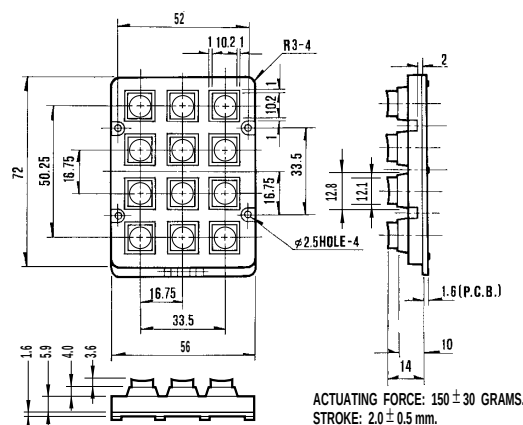

AK-1607-A-WWB-WP



AK-1607-N-BBW-WP

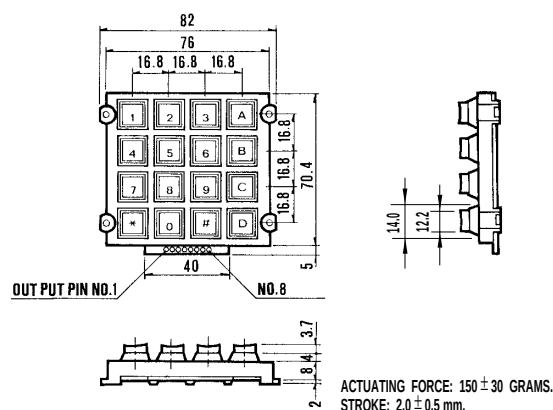


WATERPROOF METAL KEYPAD



AK-304-A-SSB-WP-MM



AK-304-N-SSB-WP-MM

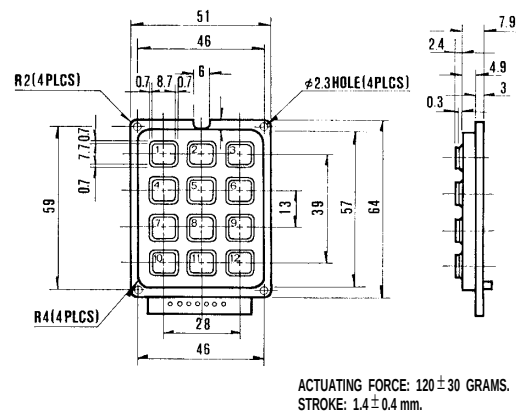


ACTUATING FORCE: 120 ± 30 GRAMS.
STROKE: 1.4 ± 0.4 mm.



AK-1604-A-SSB-WP-MM



AK-1604-N-SSB-WP-MM

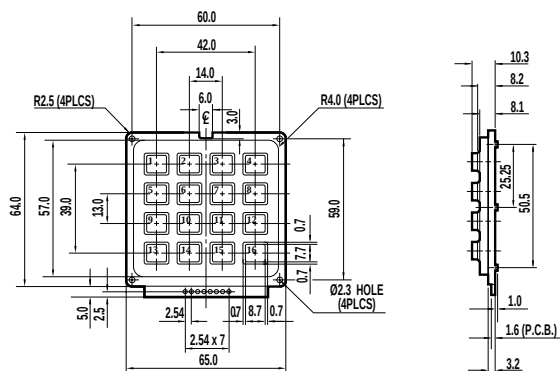


ACTUATING FORCE: 120 ± 30 GRAMS.
STROKE: 1.5 ± 0.5 mm.



AK-207-A-SSB-WP-MM



AK-207-N-SSB-WP-MM

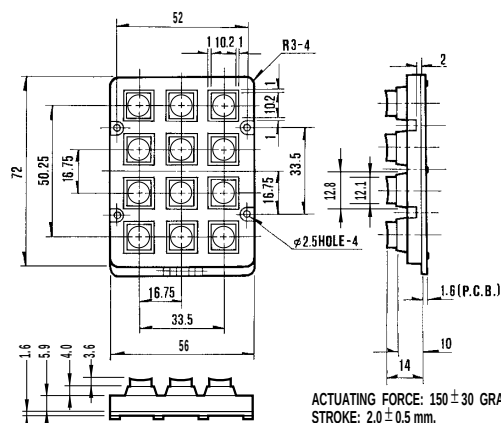


ACTUATING FORCE: 150 ± 30 GRAMS.
STROKE: 2.0 ± 0.5 mm.



AK-707-A-SSB-WP-MM




AK-707-N-SSB-WP-MM

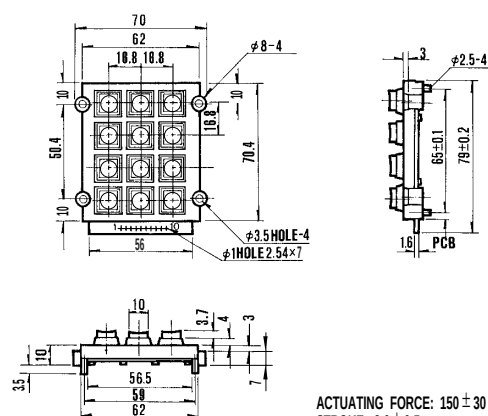


ACTUATING FORCE: 150 ± 30 GRAMS.
STROKE: 2.0 ± 0.5 mm.


WATERPROOF METAL KEYPAD

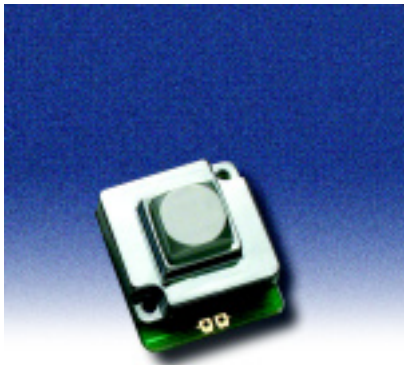

AK-101-B-SSS-WP-MM

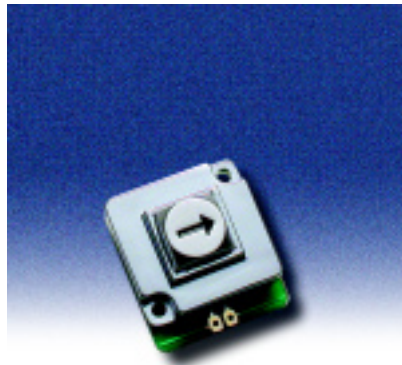


AK-101-AR-SSB-WP-MM

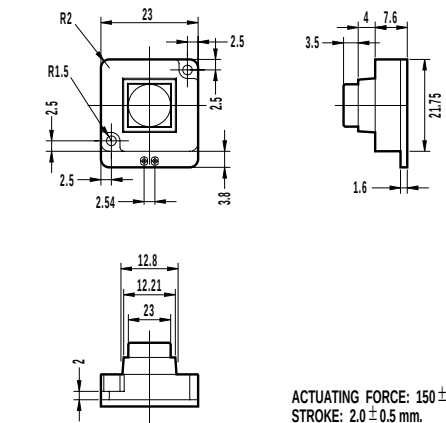

AK-102-B-SSS-WP-MM




AK-102-AR-SSB-WP-MM

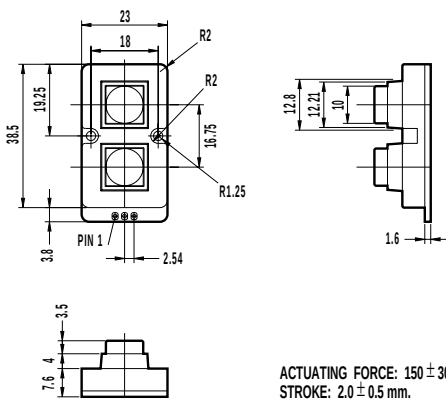

AK-103-B-SSS-WP-MM



AK-103-AR-SSB-WP-MM

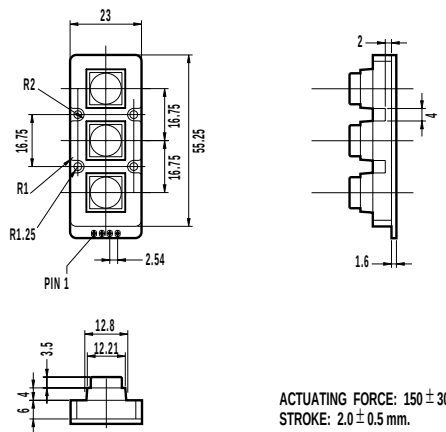

AK-104-B-SSS-WP-MM



AK-104-AR-SSB-WP-MM

