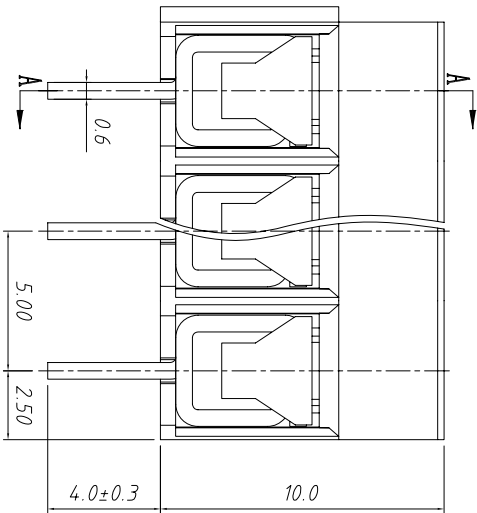
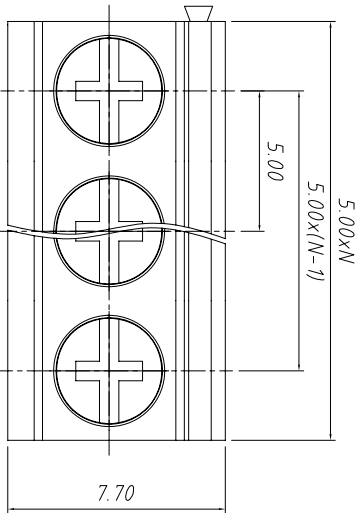


SECTION A-A

Material
Screw: M2.5, Steel,Zn plated
Shrapnel: Stainless steel, Nickel plated
Pin header: Brass or Steel, Tin plated
Housing: PA66 , UL94V-0

Electrical
Rated voltage: 300V
Rated current: 8A
Wire range: 26~14AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Soldering: 250 °C±5 °C for 5S
Torque: 0.4 N.m (3.54Lb. in)
Strip length: 6 ~ 7 mm

Order Information

L-KLS2-126 - 5.00-XXP-4 S XX

RoHS Terminal Block Pitch No. of Pole
Product Code:00~99
Screw: S- Slot Screw
C- Cross Screw
Color: 4-Green

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ± 0.60	X. ± 0.38	XX ± 0.25	X. $\pm 5^{\circ}$	X. $\pm 3^{\circ}$	XX $\pm 2^{\circ}$	
Draw by: Date		2015-09-01		UNITS		Screw CONN TERM BLOCK 5.00MM
Check by: Date		2015-09-15		SHEET SIZE		
SCALE		SHEET		OF		KLS P/N: KLS2-126-5.00-XXP-4S
KLS ELECTRONIC CO., LTD.						

PCB LAYOUT

KLS ELECTRONIC CO., LTD.