
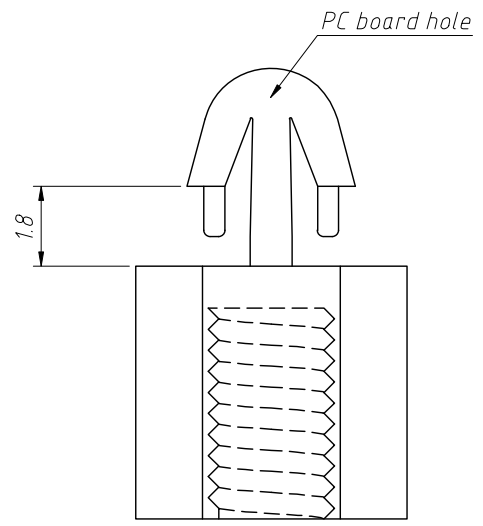


1
RoHS Compliance


6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS08011	New Version Release		Jenny	2024-05-07

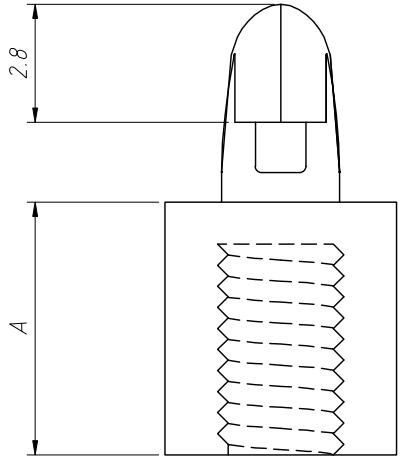

Material:
Housing:PA66,UL94 V-2,Natural

- Technical requirements:**
1. Appearance requirements: no burr, shrinkage and other defects
 2. This product does not contain lead (Pb) hydrargyrum (Hg) Cadmium (Cd) hexavalent chromium (Cr VI)
 3. This product is used at 0°~80° temperature
 4. The water absorption rate of the material used in this product is 2.5% under the temperature of 23°C and 50% relative humidity for 24 hours

- Specification**
1. Withstand voltage test 2500V/0.5mA/1Sec
 2. Temperature resistance grade: B 130° (200°C, bake for 30 minutes without melting)

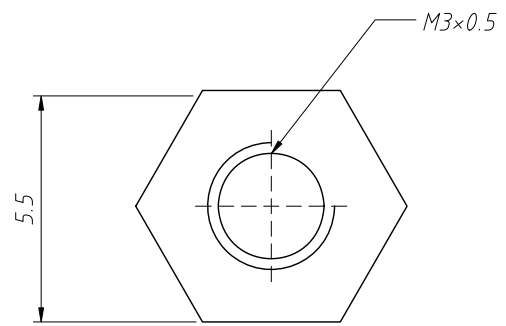

Item No:	A mm	PC board	
		PCB Hole	Thickness
BUT-05	5.0	∅3.0	1.6
BUT-06	6.0	∅3.0	1.6
BUT-07	7.0	∅3.0	1.6
BUT-08	8.0	∅3.0	1.6
BUT-09	9.0	∅3.0	1.6
BUT-10	10.0	∅3.0	1.6
BUT-12	12.0	∅3.0	1.6

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB Spacer Supports	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS8-0229B-BUT-XX	
x.xx	±0.20	Draw:	Jenny	2024-05-07	
x.xxx	±0.10	Check:	Daniel	2024-05-07	

KLS NingBo KLS ELECTRONIC CO.,L TD.