







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

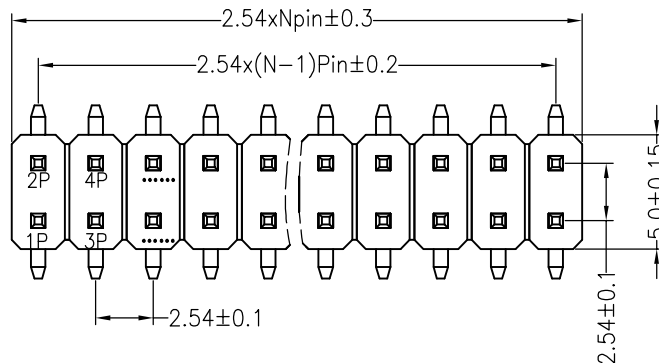

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

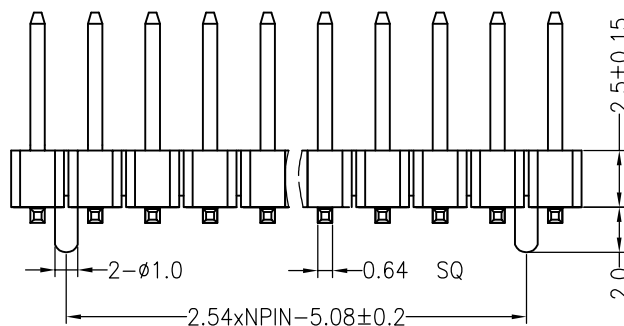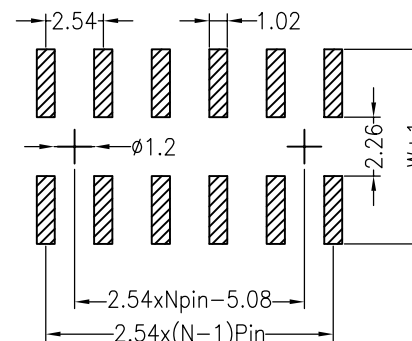

Dimension antitheses list

ITEM	PA	PB	W	L
Alternate	6.00	3.30	7.40	11.00
Alternate				

				OPERATION		DRAW	OuYangHui	18.02.01	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD.	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4			
				X.XXX	±0.10		SHEET	1/1	PART NO.	L-KLS1-207-2.50-2-14-T3-7.4X6.0X0.8-R		
A0	2018.02.01	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	☞	TITLE:	2.54PH 2xNpin H2.5mm SMT	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							