



公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


A

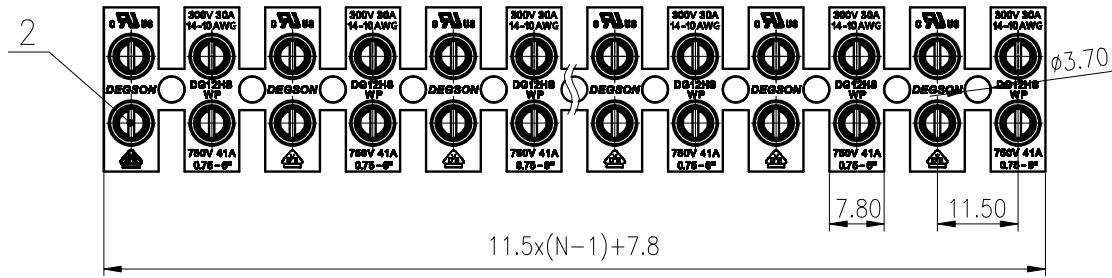


B

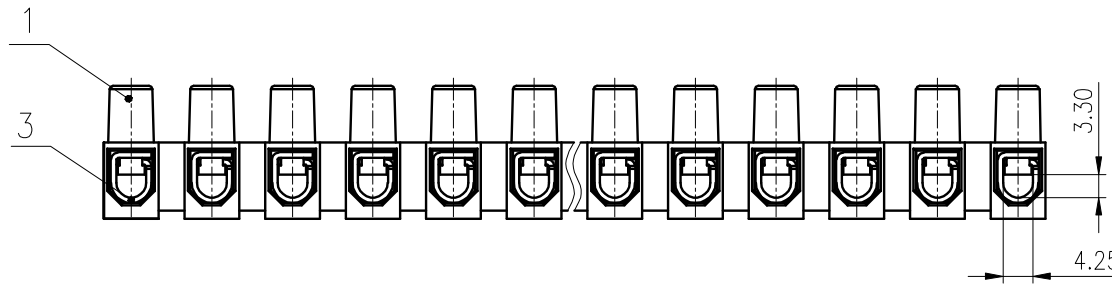

C

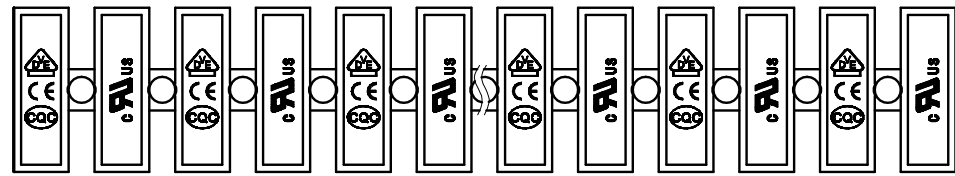

D

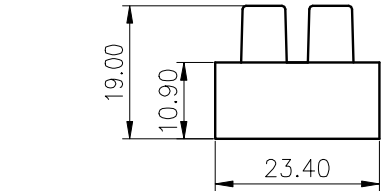

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电涌/Rated Voltage(V)/Current(A)		300/30	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电涌/Rated Voltage(V)/Current(A)		/	750/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	3.0
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3.5, 0.8/7.02	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)		0.75~6/14~10	
间距/Pitch(mm)/线数范围/Poles		11.5	
剥线长度/Stripping length(mm)		9	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>		
STATUS: /			
APPD:			
CHKD:			
DRFT: WangY1 2020.05.22	NAME: <b>DG12HWP-1.2-XXP-1Y-100A(H)</b>		
	DRAWING NO.: DG12HWP-1.2-C01		REV TO
	TYPE: CUSTOMER DRAWING		SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE