




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

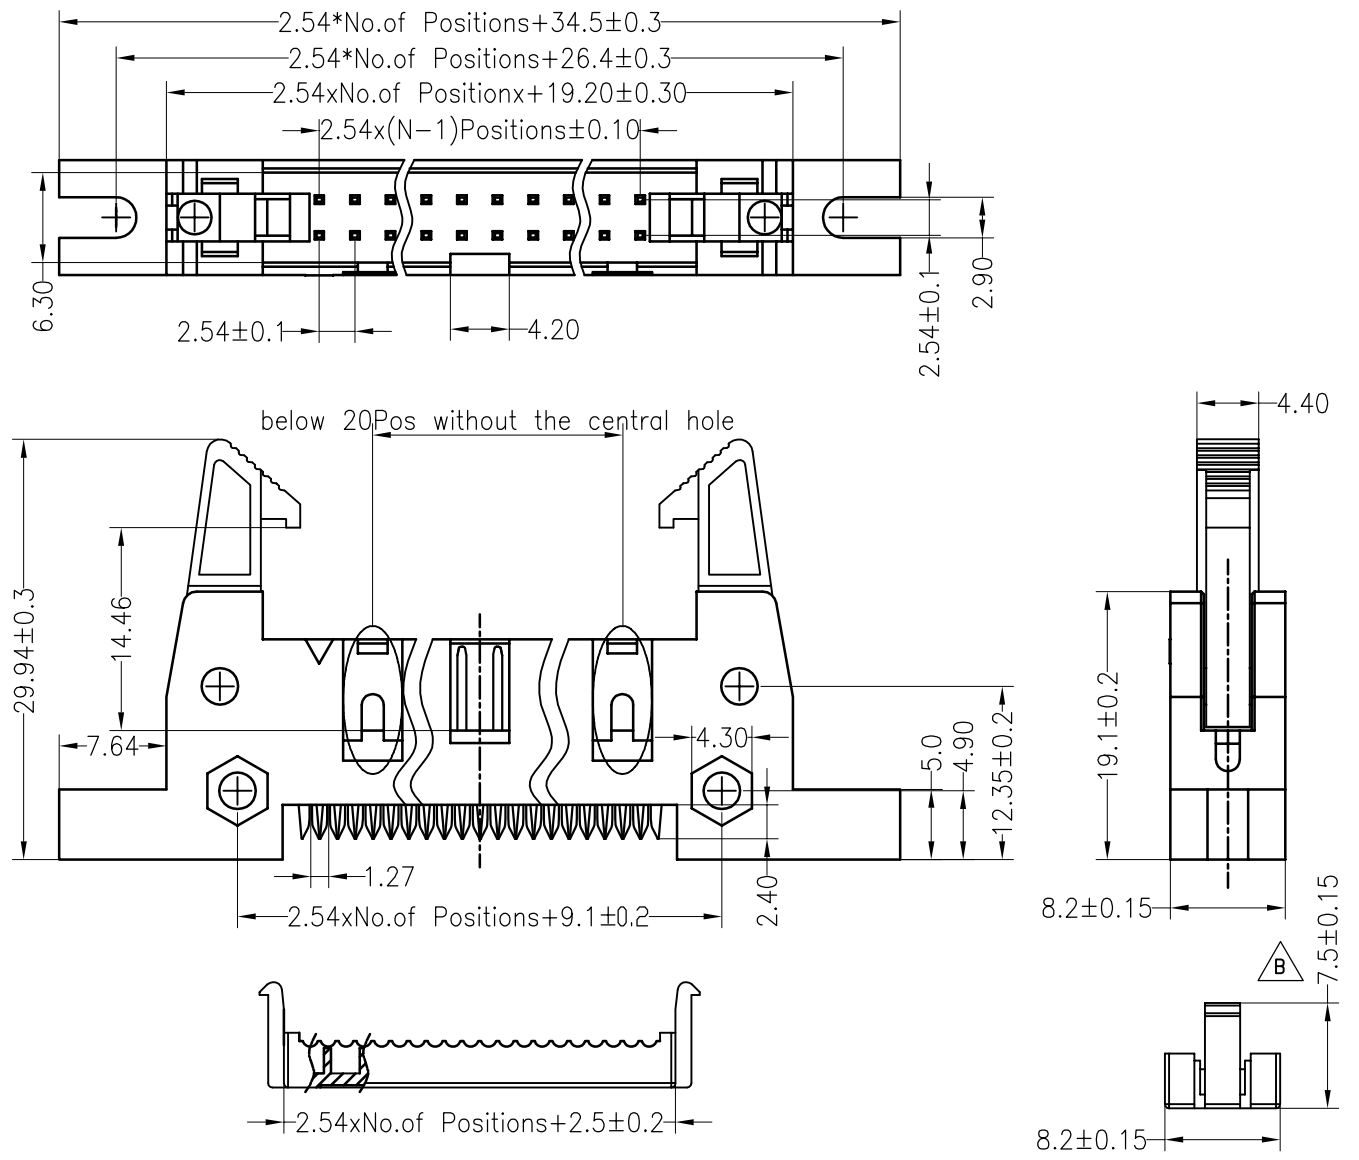

				OPERATION		DRAW	YiYuSheng	14.04.09	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD.	
				X.X	±0.30				UNIT	mm		
B	2014.04.09	Change cover heigh size(6.52 → 7.50)	BEN	X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-201Y-16-G-E
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:	2.54mm Ejector Header IDC-Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL		PROJ.	◆				