



Notes:

1. Electrical Characteristics:

- 1.1 Contact Resistance: 20mΩ Max.
- 1.2 Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- 1.3 Insulation Resistance: 1000MΩ Min.
- 1.4 Current Rating: 1.5A.
- 1.5 Temperature: -40°C~+105°C.

2. Materials:

- 2.1 Contact Material: Copper Alloy.
- 2.2 Contact Plating: Tin Over Nickel.
- 2.3 Insulator Materials: PBT, Black, UL94-V0.

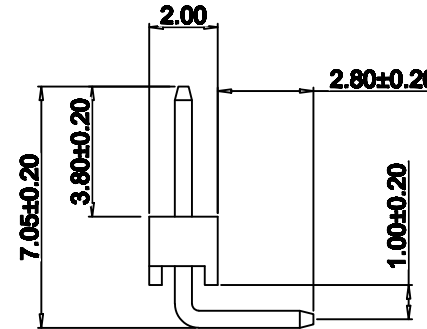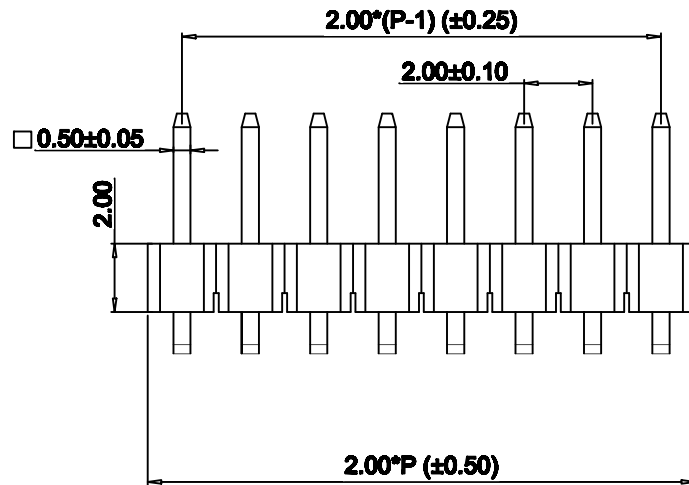

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL			NOTE	
DWG.		DATE	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE	SCALE	5:1				
APP.		DATE			NAME PLS2-XXR			