

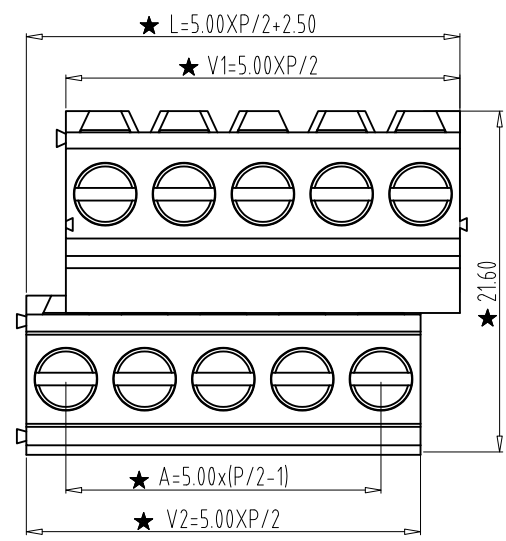
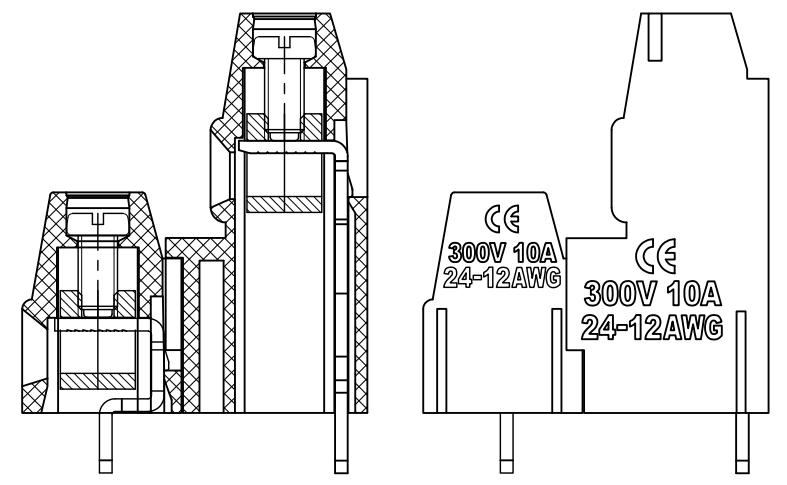


PCB LAYOUT

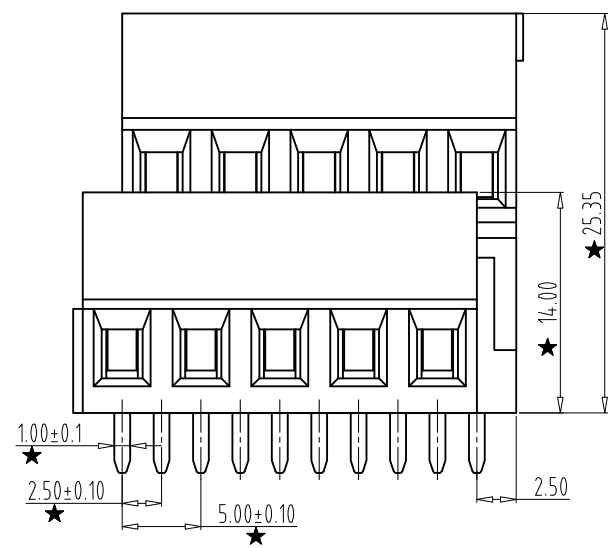

- NOTES:**
1. Rating:300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN;
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C;
 5. Screw Torque Vlaue:0.4N.m;
 6. Suitable Electric Wire: 12-24AWG .
 7. "★" is critical dimension to be controlled.

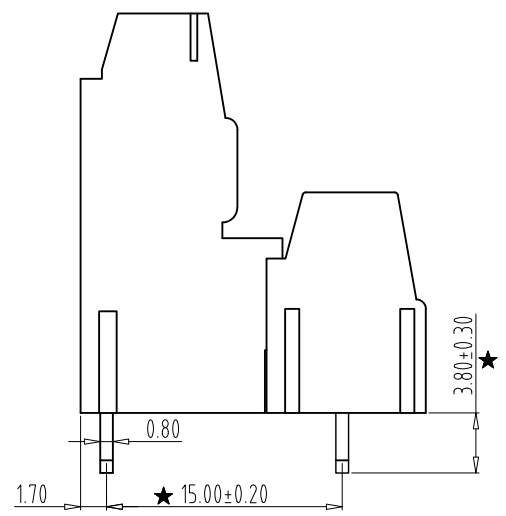

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		≡		-		//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 100	over 150	over 150
±0.18	±0.25	±0.30	±0.35	±0.40	±0.45	±0.60	±0.70	±0.85	±1.20	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.00	0.2	0.3	0.3	0.2	0.3	0.3	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL			NOTE	
DWG.		DATE	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE	SCALE	3:1		128HLB-5.00		
APP.		DATE	NAME		KSE-128HLB-5.00-XX			
			DWGNO.					

