

SMD LED LAMP, Dome Lens
BL-LS3528H0S1PGC
Features:

- 3.5mmx2.8mm SMD, 3.5mm THICKNESS PLCC2 package
- Black housing, Dome Lens
- Mono-color type, Ultra brightness
- Compatible with automatic placement equipment.
- IDEAL FOR VMS and display panel.
- PACKAGE: 2KPCS/REEL
- RoHs Compliance


Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2 (deg)
	Emitted Color	Material	λ _p (nm)		Typ	Max	Min.	Typ.	
					BL-LS3528H0S1PGC	Ultra Pure Green	InGaN	525	

Absolute maximum ratings (Ta=25°C)


Parameter	Rating	Unit
Forward Current I _F	50	mA
Power Dissipation P _d	78	mW
Reverse Voltage V _R	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	200	mA
Operation Temperature T _{OPR}	-20 to +80	°C
Storage Temperature T _{STG}	-40 to +85	°C
Lead Soldering Temperature T _{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)	°C

SMD LED LAMP, Dome Lens

BL-LS3528H0S1PGC

■ **Package configuration & Internal circuit diagram**

BL-LS3528H0S1 SERIES

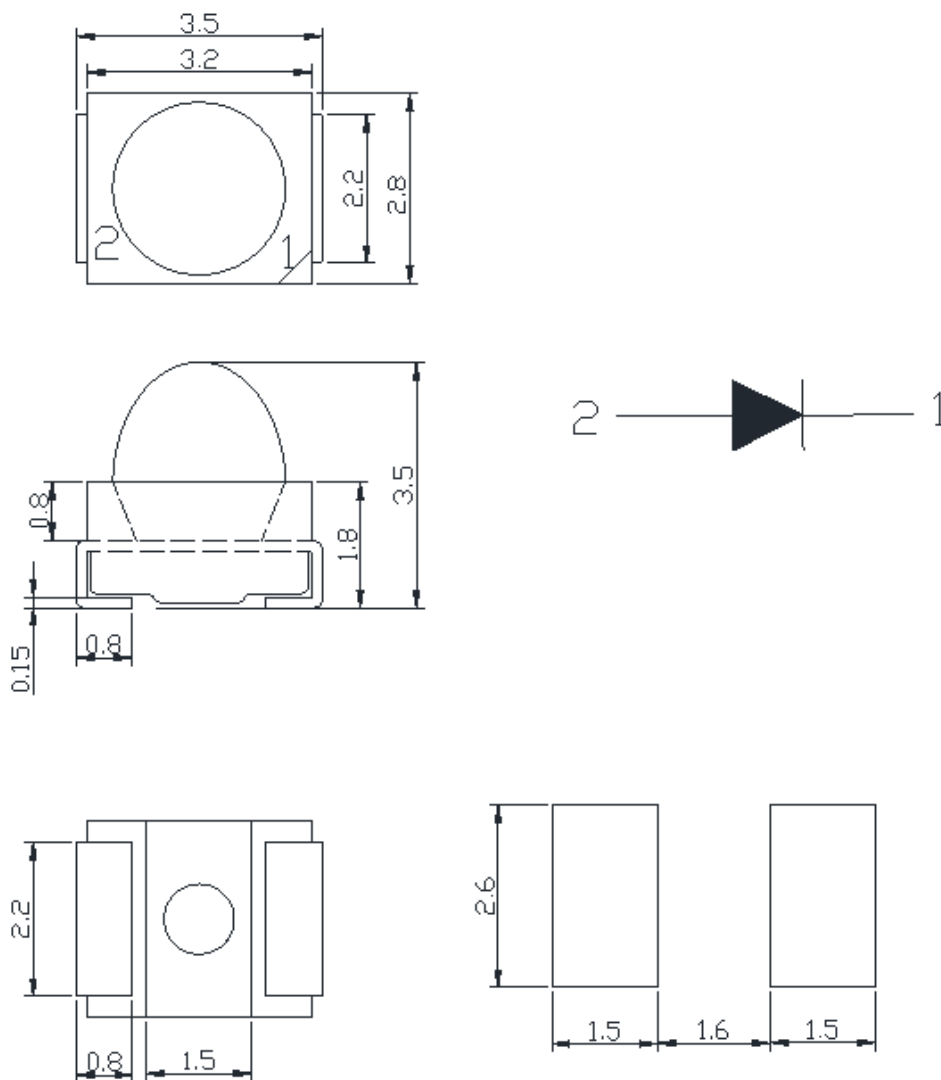

Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


SMD LED LAMP, Dome Lens

BL-LS3528H0S1PGC

■ **SMT Reflow Solder Instructions**

Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process


■ **Lead-free Solder**

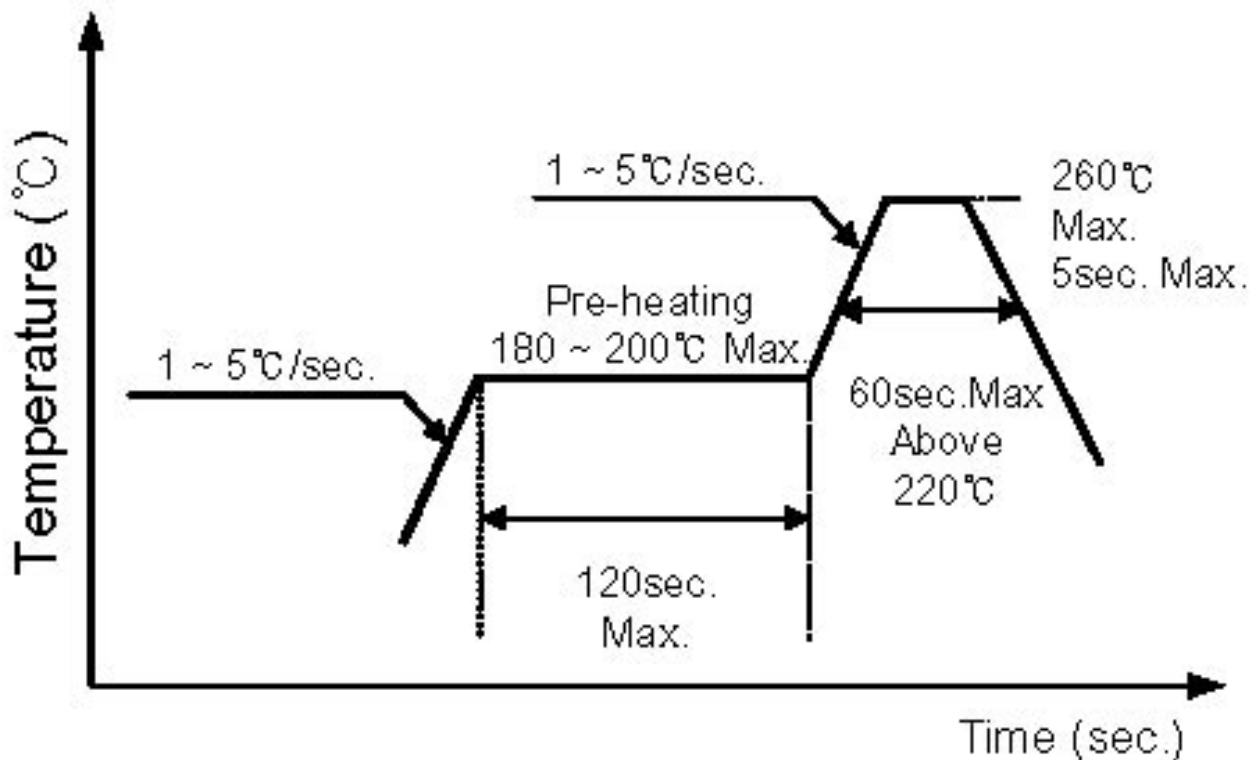

SMD LED LAMP, Dome Lens

BL-LS3528H0S1PGC


■ **Recommended Soldering Pattern**
(Unit: mm)

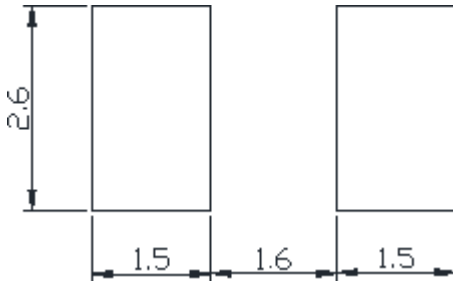

■ **Tape Specifications**
(Unit: mm)

Unit: mm







Tolerance: ± 0.1

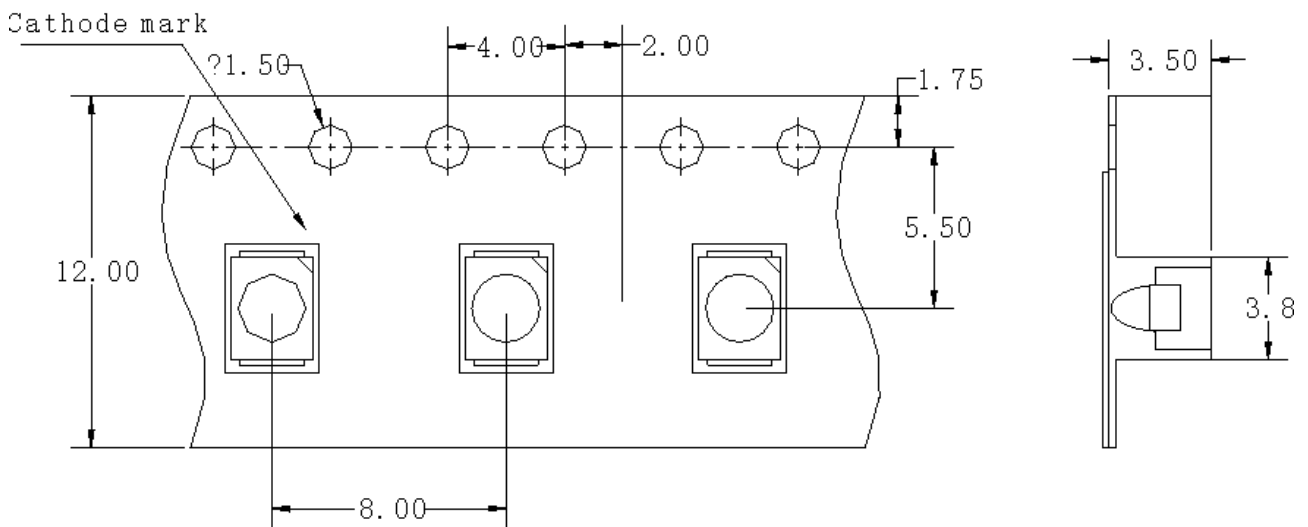

SMD LED LAMP, Dome Lens

BL-LS3528H0S1PGC

■ **Typical electrical-optical characteristics curves:**

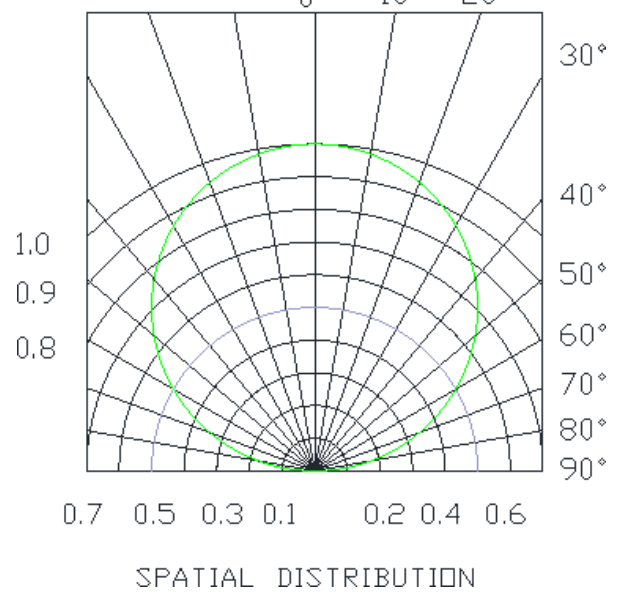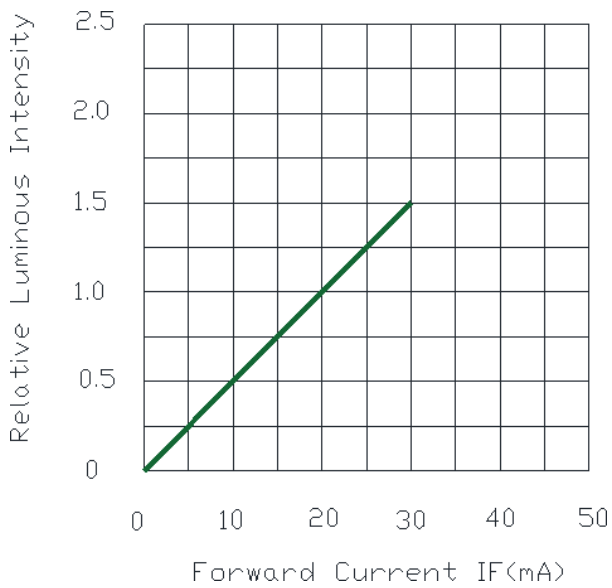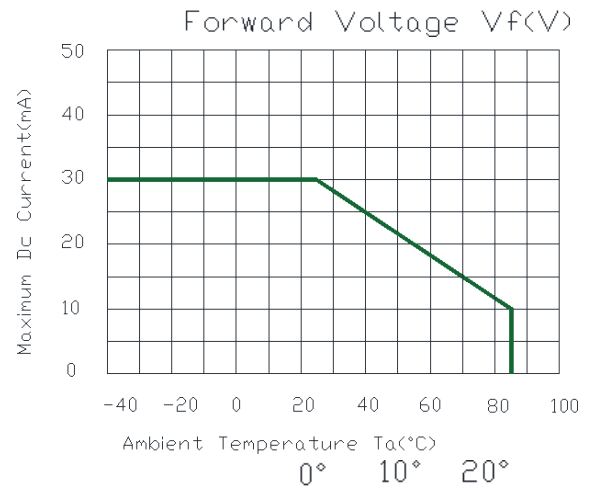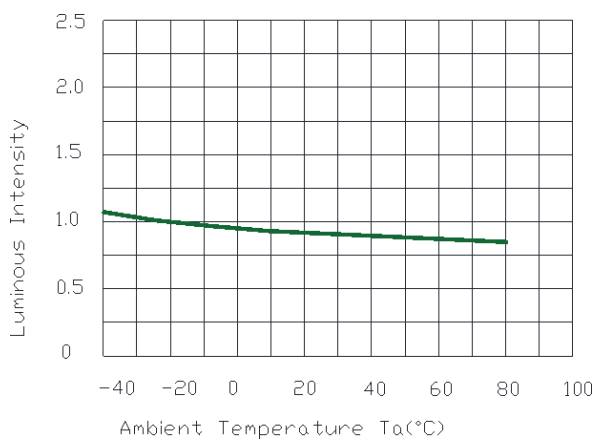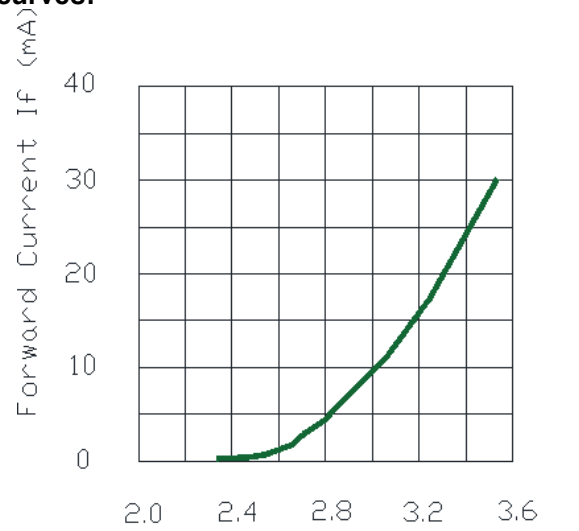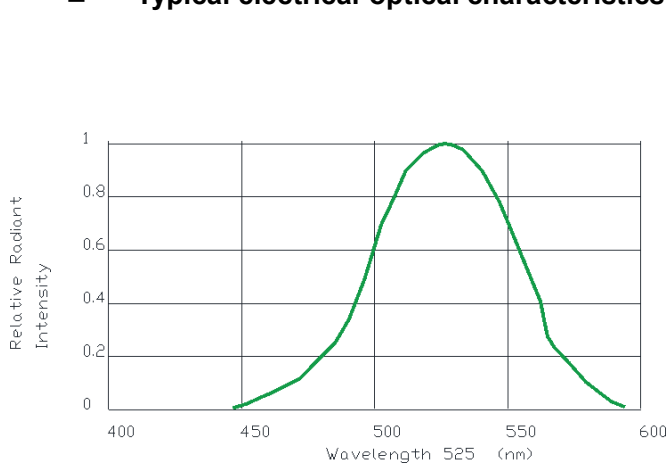

SMD LED LAMP, Dome Lens

BL-LS3528H0S1PGC

■ **Packing and weighting**

