

S P E C I F I C A T I O N

Product Name VARIABLE RESISTOR

Model No. VG039NCHXT

Control No. _____

Date January 9, 2007

| |
|------------------|
| SALES DEPARTMENT |
| Sales |
| Representative |
| Approved |

The contents of this specification may change without prior notice. For inquiries, please refer to product name, model No., and control No. written in the cover sheet of this specification. Because this specification is for reference only, for your actual use of this part please acknowledge and sign the formal specification for this part.

1. Scope

This specification applies to 3 mm Chip trimmer potentiometer with Metal - Glaze - Resistor, used in electronic equipment.

2. Construction (Dimensions and Materials) and Rating

2.1. Dimension See attached Drawing.

2.2. Materials See attached Material List


2.3. Operating Temperature Range -40 ~ +100

2.4. Storage Temperature Range -10 ~ +40

2.5. Nominal Total Resistance Range 100 ~ 1 M
(1 · 2 · 3 · 5 series, see attached Application List)

2.6. Total Resistance Tolerance ± 25 %

2.7. Power Rating 0.15 W (~ +70)
Power rating vs. ambient temperature shall be denoted on the following chart.

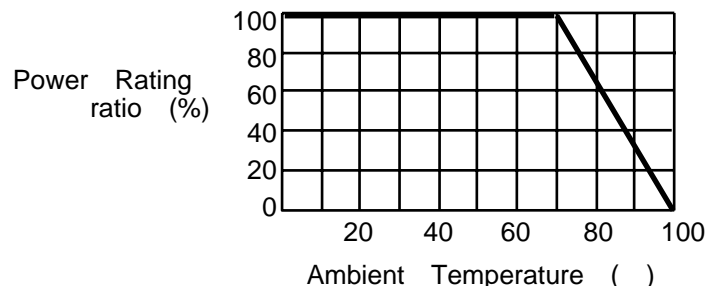

2.8. Rated Voltage $E = \sqrt{P \cdot R}$

Where P : Power Rating (W)
R : Nominal Total Resistance ()

When the rated voltage exceeds the maximum operating voltage, the maximum operating voltage shall be the rated voltage.

2.9. Maximum Operating Voltage 50 V

3. Characteristics

Standard atmospheric conditions


Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows :

Ambient temperature : 5 to 35
 Relative humidity : 45 % to 85 %
 Air pressure : 860 hPa to 1 060 hPa

If there is any doubt about the results, measurements shall be made within the following limits :

Ambient temperature : 20 ± 2
 Relative humidity : 60 % to 70 %
 Air pressure : 860 hPa to 1 060 hPa

3.1. Mechanical characteristics
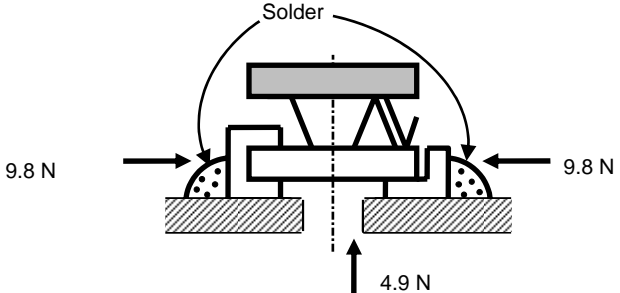
| | Item | Conditions | Specifications |
|---|---------------------------|---|--|
| 1 | Total Mechanical Rotation | | 270 ° ± 20 ° |
| 2 | Rotational Torque | | 0.98 mN·m ~ 11.76 mN·m |
| 3 | End Stop Strength | The following torsion moment of 14.7 mN·m shall be applied to the spindle for 5 seconds in any direction. | Without distinct looseness or poor contact. |
| 4 | Soldering Strength | <p>A static load shown in this figure shall be applied to terminals for 30 s after soldering.</p>  | Without distinct looseness or poor contact. |
| 5 | Push Load | A push load of 9.8 N shall be applied to the axial direction for 30 seconds from upper part of the product. | Without distinct looseness or poor contact. Without board breaking. |

3. Characteristics

3.2. Electrical characteristics

| | Item | Conditions | Specifications | | | | | | | | | | |
|---------|------------------------------------|---|---|--|---------|---------|---|---------|---|---------|---|----------|-------------------|
| 1 | Resistance Law (Taper) | Output voltage ratio at the middle of total rotational angle. | 40 % ~ 60 % (Linear taper) | | | | | | | | | | |
| 2 | Ineffective Rotation | Ineffective rotation is the sum of all rotational distances in which resistance does not change and is calculated as a percentage of the total mechanical rotation. | 10 % or less of total mechanical rotation, at each end. | | | | | | | | | | |
| 3 | Residual Resistance | The resistances at each end of the mechanical rotation between terminals 1 and 2, or 2 and 3 shall be measured. | Total nominal resistance 1 k or less | 20 or less | | | | | | | | | |
| | | | Total nominal resistance more than 1 k | 2 % or less of total nominal resistance. | | | | | | | | | |
| 4 | Contact Resistance | <p>The moving contact shall be rotated to a point where the resistance between terminals 1 and 2 is half of the total resistance. Contact resistance shall be calculated by the following formula :</p> $\frac{(R_{12}+R_{23}) - R_{13}}{2 \times R_{13}} \times 100(\%)$ <p>Where R₁₂ : Resistance between terminals 1 and 2 R₂₃ : Resistance between terminals 2 and 3 R₁₃ : Resistance between terminals 1 and 3</p> | 5 % or less of nominal total resistance. | | | | | | | | | | |
| 5 | Temperature Coefficient (T. C. R.) | <p>The trimmer potentiometer shall be maintained in a thermostatic chamber at a temperature, according to the table as shown below.</p> <table border="1" data-bbox="555 1169 975 1431"> <thead> <tr> <th>Step</th> <th>Temperature()</th> </tr> </thead> <tbody> <tr> <td>Initial</td> <td>+25 ± 2</td> </tr> <tr> <td>1</td> <td>-40 ± 3</td> </tr> <tr> <td>2</td> <td>+25 ± 2</td> </tr> <tr> <td>3</td> <td>+100 ± 3</td> </tr> </tbody> </table> <p>The measurement shall be made, after the thermostatic chamber achieved the mark temperature and maintained for 30 min ~ 45min.</p> | Step | Temperature() | Initial | +25 ± 2 | 1 | -40 ± 3 | 2 | +25 ± 2 | 3 | +100 ± 3 | Within ± 250 ppm/ |
| Step | Temperature() | | | | | | | | | | | | |
| Initial | +25 ± 2 | | | | | | | | | | | | |
| 1 | -40 ± 3 | | | | | | | | | | | | |
| 2 | +25 ± 2 | | | | | | | | | | | | |
| 3 | +100 ± 3 | | | | | | | | | | | | |

3.3. Endurance characteristics

When the items in mark, the moving contact shall be rotated to a point where the resistance between 1 and 2 is half of the total resistance.


| | Item | Conditions | Specifications | | | | | | | | | | | | | | | |
|------|---------------------------------|--|--|-------------|----------|---|--------------|--------|---|---------------------------------|------------------|---|-------------|--------|---|---------------------------------|------------------|---|
| 1 | Vibration | <p>The entire frequency range, from 10 Hz to 55 Hz and return to 10 Hz, shall be transversed in 1 min. Amplitude (total excursion): 1.5 mm This motion shall be applied for a period of 2 h in each of 3 mutually perpendicular directions. (a total of 6 h)</p> | <p>Change in resistance between 1 and 2 is relative to the value before test. Within $\pm 5\%$ Without an instant open during the test.</p> | | | | | | | | | | | | | | | |
| 2 | Resistance to Soldering Heat | <p><u>Re-flow soldering method</u> Peak temperature : Within 260 ± 10 s Application time : more than 230 , Within 40 s</p> <p><u>Soldering iron method</u> Tip temperature : 400 ± 10 Application time of soldering iron : 3 s + 1 s / - 0 s.</p> | <p>Within $\pm 2\%$ of initial resistance.</p> | | | | | | | | | | | | | | | |
| 3 | High Temperature Storage | <p>The trimmer potentiometer shall be subjected in a thermostatic chamber at a temperature of 70 ± 2 without electrical load for 1 000 h ± 12 h. Then the trimmer potentiometer shall be taken out from the chamber and maintained at standard atmospheric conditions for 1 h ~ 2 h, after which measurements shall be made.</p> | <p>Change in total resistance is relative to the value before test. Within $\pm 5\%$</p> | | | | | | | | | | | | | | | |
| 4 | Load Life | <p>The trimmer potentiometer shall be subjected in a thermostatic chamber at a temperature of 70 ± 2 with a DC rated voltage for 1.5 h between terminals 1 and 3 followed by a pause of 30 min for 1 000 h ± 12 h. Then the trimmer potentiometer shall be taken out from the chamber and maintained at standard atmospheric conditions for 1 h ~ 2 h without electrical load, after which measurements shall be made.</p> | <p>Change in total resistance is relative to the value before test. Within $\pm 5\%$</p> | | | | | | | | | | | | | | | |
| 5 | Temperature Cycle | <p>The trimmer potentiometer shall be subjected in a thermostatic chamber at 5 successive change of temperature cycles, each as shown in table below. Then the trimmer potentiometer shall be taken out from the chamber and maintained at standard atmospheric conditions for 1 h ~ 2 h, after which measurements shall be made.</p> <table border="1" data-bbox="459 1585 1141 1845"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>- 40 ± 3</td> <td>30 min</td> </tr> <tr> <td>2</td> <td>Standard atmospheric conditions</td> <td>10 min to 15 min</td> </tr> <tr> <td>3</td> <td>100 ± 2</td> <td>30 min</td> </tr> <tr> <td>4</td> <td>Standard atmospheric conditions</td> <td>10 min to 15 min</td> </tr> </tbody> </table> | Step | Temperature | Duration | 1 | - 40 ± 3 | 30 min | 2 | Standard atmospheric conditions | 10 min to 15 min | 3 | 100 ± 2 | 30 min | 4 | Standard atmospheric conditions | 10 min to 15 min | <p>Change in total resistance is relative to the value before test. Within $\pm 2\%$ Without distinct looseness or poor contact.</p> |
| Step | Temperature | Duration | | | | | | | | | | | | | | | | |
| 1 | - 40 ± 3 | 30 min | | | | | | | | | | | | | | | | |
| 2 | Standard atmospheric conditions | 10 min to 15 min | | | | | | | | | | | | | | | | |
| 3 | 100 ± 2 | 30 min | | | | | | | | | | | | | | | | |
| 4 | Standard atmospheric conditions | 10 min to 15 min | | | | | | | | | | | | | | | | |

| | Item | Conditions | Specifications |
|---|--------------------|--|--|
| 6 | Humidity | The trimmer potentiometer shall be subjected in a thermostatic chamber at a temperature of 40 ± 2 with relative humidity of 90% to 95% without electrical load for $1\ 000\ h \pm 12\ h$. Then the trimmer potentiometer shall be taken out from the chamber and its surface moisture shall be removed. And then the trimmer potentiometer shall be maintained at standard atmospheric conditions for $1\ h \sim 2\ h$, after which measurement shall be made. | Change in total resistance is relative to the value before test. Within $\pm 5\ %$ |
| 7 | Humidity Load Life | The trimmer potentiometer shall be subjected in a thermostatic chamber at a temperature of 40 ± 2 and a relative humidity of 90% to 95% with a DC rated voltage for 1.5 hours between terminals 1 and 3 followed by a pause of 30 minutes for $1\ 000\ h \pm 12\ h$. Then the trimmer potentiometer shall be taken out from the chamber and its surface moisture shall be removed. And then the trimmer potentiometer shall be maintained at standard atmospheric conditions for $1\ h \sim 2\ h$ without electrical load, after which measurement shall be made. | Change in total resistance is relative to the value before test. Within $\pm 5\ %$ |
| 8 | Rotational Life | The moving contact shall be rotated without electrical load for $20\ cycles \pm 2\ cycles$ at a rate of $10\ min^{-1}$. (A cycle of operation is defined as the travel of the moving contact from one end of the resistance element to the other and back through 90% of the total mechanical rotation.) | Change in total resistance is relative to the value before test. Within $\pm 10\ %$ |

4. Marking

Nominal total resistance First number shows significant figures and the other shows quantity of zero.

ex. 1 k 13
 10 k 14
 100 k 15

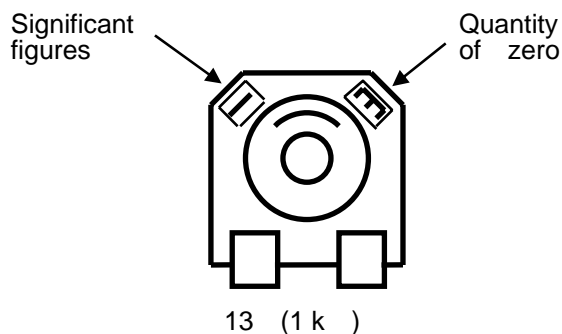

5. The others

5.1. Preset Position

The moving contact set half position of total rotation angle ($50\% \pm 15\%$ of total rotation angle) on delivery.

5.2. Application Notes

- The soldering for this product should be reflow soldering. Please note that this product is not applicable to flow soldering.
- Be careful with flying flux in soldering.
- If flux was stuck on the resistance, please wash it out thoroughly by alcoholic solvent.
- Handle the trimmer potentiometer with care.
- This product is not what meant the use to affect the human body life which needs advanced safety and reliability, and the use of nuclear relation, and carried out design manufacture.
- Please refer to EIAJ RCR-2191A "notes guideline(safe application guide of a potentiometer) of the potentiometer for electric devices" about notes on other use.
- In a case where there is a wiring pattern right under this product after mounting. Please be sure to do some insulation measures on the pattern with a resist or some other materials.

5.3. The wish matter of the consideration to the safety of a product

Although we are exerting our best effects to maintain the quality of this product, we cannot guarantee that they will never cause short circuiting and open circuitry.

Therefore, when designing an equipment or device with which the priority is given to the safety, you will please carefully study the influences to the whole equipment of a single function failure of potentiometer in advance to make out a fail-safe design providing.

5.4. Industrial Proprietorship



If the trouble on industrial proprietorship (related on delivered product s design and production) happens, we solves it on own responsibility.


5.5. Nation of products

CHINA

6. Taping Specification

- 6.1. Dimension..... Dwg. No.F-362.022
- 6.2. Taping direction Dwg. No.F-362.022 and Fig.2
- 6.3. Peeling strength of cover tape..... 0.1 N ~ 0.7 N
- 6.4. Taping method..... Fig.1
- 6.5. Taping quantity 2 500 pcs./reel

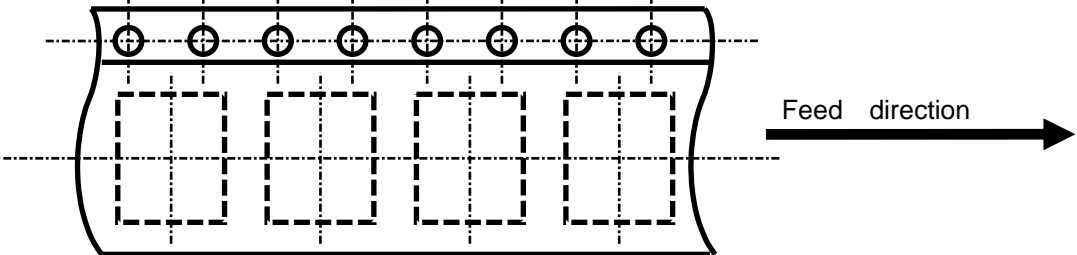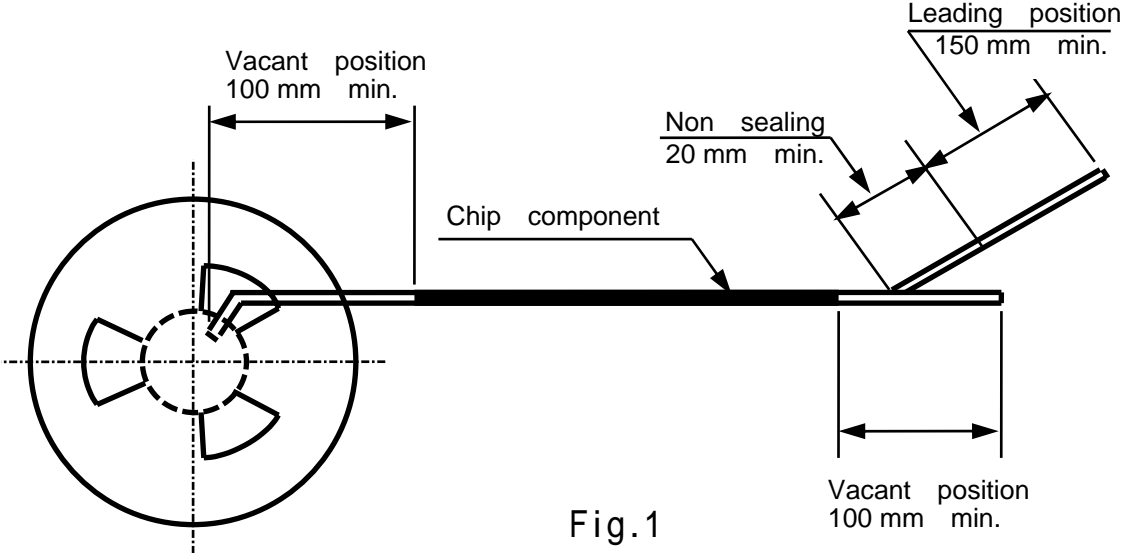

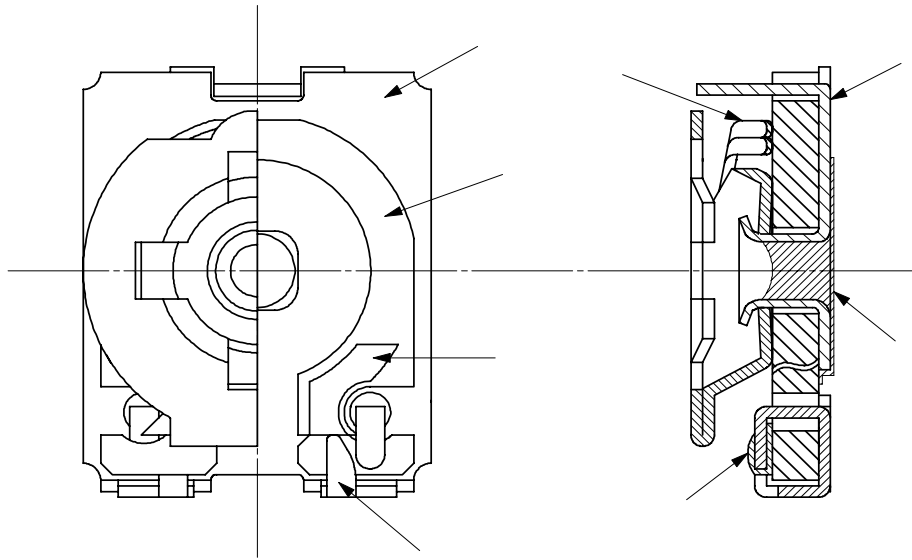

| No. | PART NAME 部品名 | BASE MATERIAL 材質 | PLATING 処理 |
|-----|--------------------------------|-----------------------------------|---|
| 1 | BOARD 基板 | CERAMIC Al_2O_3 セラミック (アルミナ) | |
| 2 | RESISTOR 抵抗体 | METAL GLAZE COATING メタルグレイズ皮膜 | |
| 3 | ELECTRODE 電極 | AgPd 銀パラジウム | |
| 4 | 1st, 3rd TERMINAL 1番, 3番 端子 | STEEL 鋼板 | UNDER PLATING Ni : 0.5 ~ 2 μ m 下地メッキ |
| | | | SURFACE PLATING Sn : 2 μ m ~ 4 μ m 表面メッキ |
| 5 | 2nd TERMINAL 2番 端子 | STEEL 鋼板 | UNDER PLATING Ni : 0.5 ~ 2 μ m 下地メッキ |
| | | | SURFACE PLATING Sn : 2 μ m ~ 4 μ m 表面メッキ |
| 6 | TERMINAL JOINT 端子接合部 | SOLDER (Sn-3Ag-0.5Cu) 鉛フリー半田 | |
| 7 | MOVING CONTACT 摺動子 | STAINLESS STEEL ステンレス | |
| 8 | SEALING RESIN 封止樹脂 | ACRYL アクリル系 | |

/Apprication List

(適用外形寸法図/Drawing : F-362.021,F-362.022)

| Rev. | 公称全抵抗値 Nominal Total Resistance | 抵抗値 許容差 Tolerance | 残留抵抗値/Residual Resistance | | 品番 Part Number | 備考 Remark |
|------|------------------------------------|-------------------------|-------------------------------------|-------------------------------------|-------------------|-----------------|
| | | | 1-2 間 Between Terminal #1& #2 | 2-3 間 Between Terminal #2& #3 | | |
| | B100 | ± 25 % | 20 max | 20 max | | VG039NCHXT B101 |
| | B200 | | | | | B201 |
| | B220 | | | | | B221 |
| | B300 | | | | | B301 |
| | B330 | | | | | B331 |
| | B470 | | | | | B471 |
| | B500 | | | | | B501 |
| | B680 | | | | | B681 |
| | B1 k | | ↓ | ↓ | | B102 |
| | B2 k | | 40 max | 40 max | | B202 |
| | B2.2 k | | 44 max | 44 max | | B222 |
| | B3 k | | 60 max | 60 max | | B302 |
| | B3.3 k | | 66 max | 66 max | | B332 |
| | B4.7 k | | 94 max | 94 max | | B472 |
| | B5 k | | 100 max | 100 max | | B502 |
| | B6.8 k | | 136 max | 136 max | | B682 |
| | B10 k | | 200 max | 200 max | | B103 |
| | B20 k | | 400 max | 400 max | | B203 |
| | B22 k | | 440 max | 440 max | | B223 |
| | B30 k | | 600 max | 600 max | | B303 |
| | B33 k | | 660 max | 660 max | | B333 |
| | B47 k | | 940 max | 940 max | | B473 |
| | B50 k | | 1 k max | 1 k max | | B503 |
| | B68 k | | 1.36 k max | 1.36 k max | | B683 |
| | B100 k | | 2 k max | 2 k max | | B104 |
| | B200 k | | 4 k max | 4 k max | | B204 |
| | B220 k | | 4.4 k max | 4.4 k max | | B224 |
| | B300 k | | 6 k max | 6 k max | | B304 |
| | B330 k | | 6.6 k max | 6.6 k max | | B334 |
| | B470 k | | 9.4 k max | 9.4 k max | | B474 |
| | B500 k | | 10 k max | 10 k max | | B504 |
| | B680 k | | 13.6 k max | 13.6 k max | | B684 |
| | B1 M | ↓ | 20 k max | 20 k max | | ↓ |


4

3


2

1

摺動子回転範囲
Wiper Rotating Area


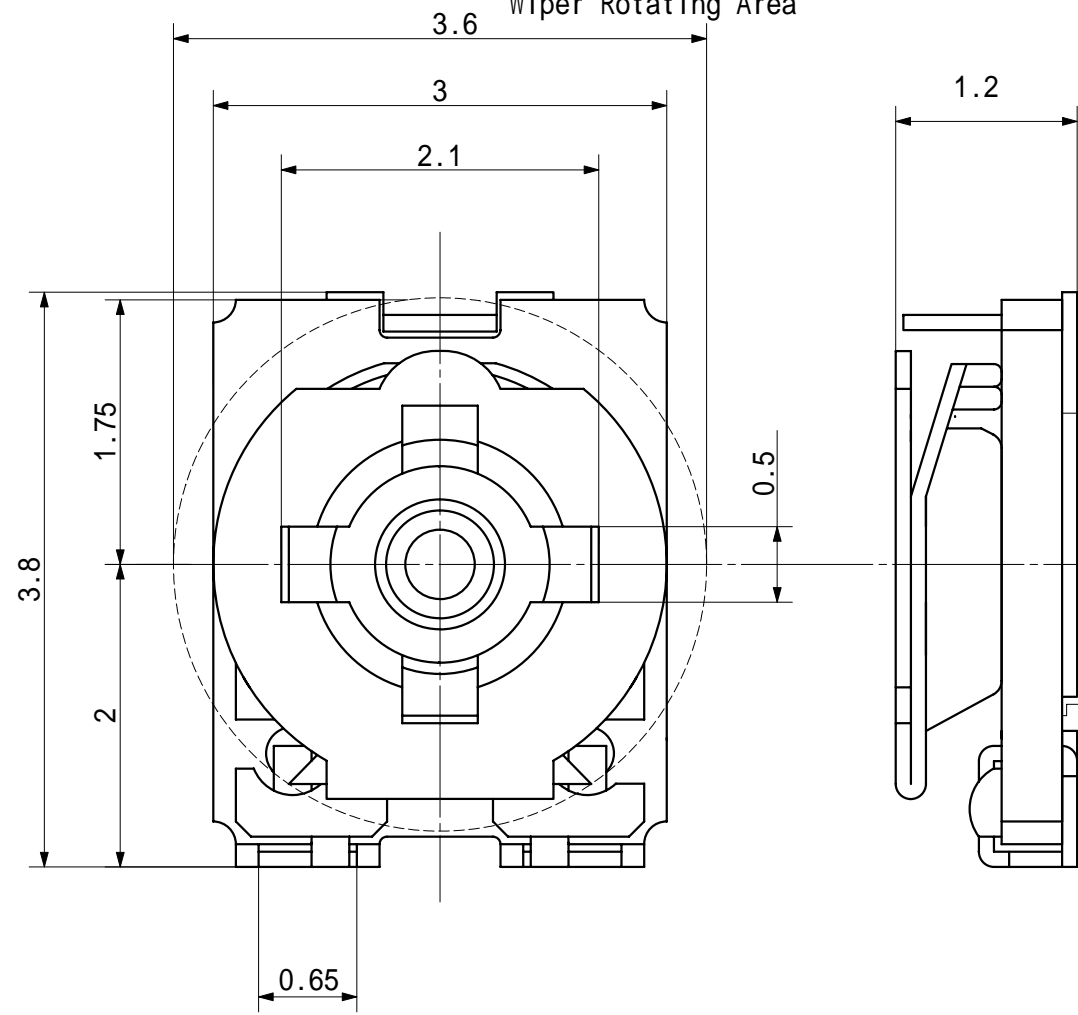


裏面樹脂封止
Resin

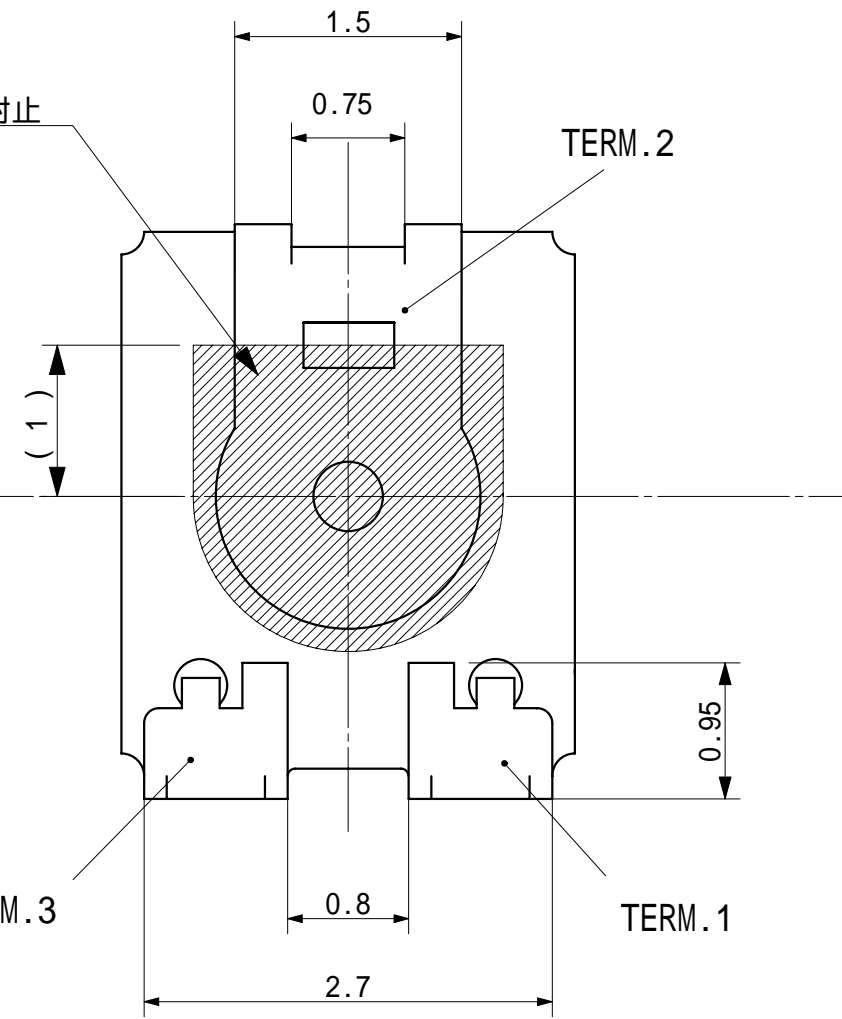

推奨ランドパターン寸法 (10/1)
PATTERN APPLICATION EXAMPLE (Scale 10/1)

回路図
CIRCUIT

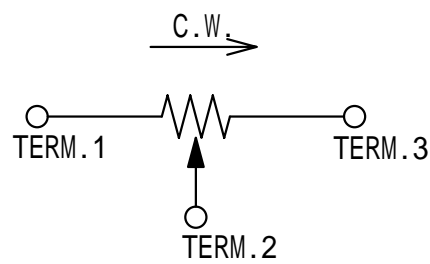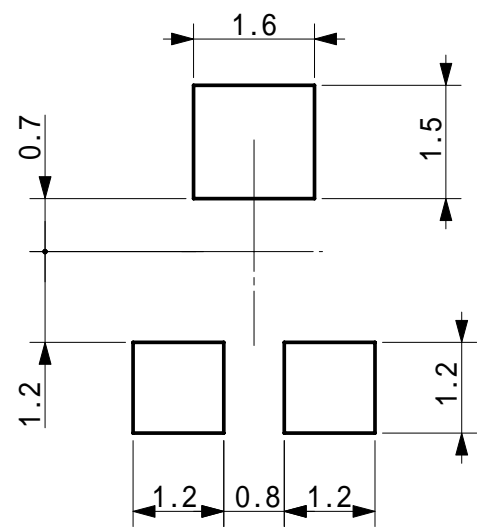

DRAWING DATE

FF No.4006B

4

3

2

1

D

D

C


C

B


B

A

A

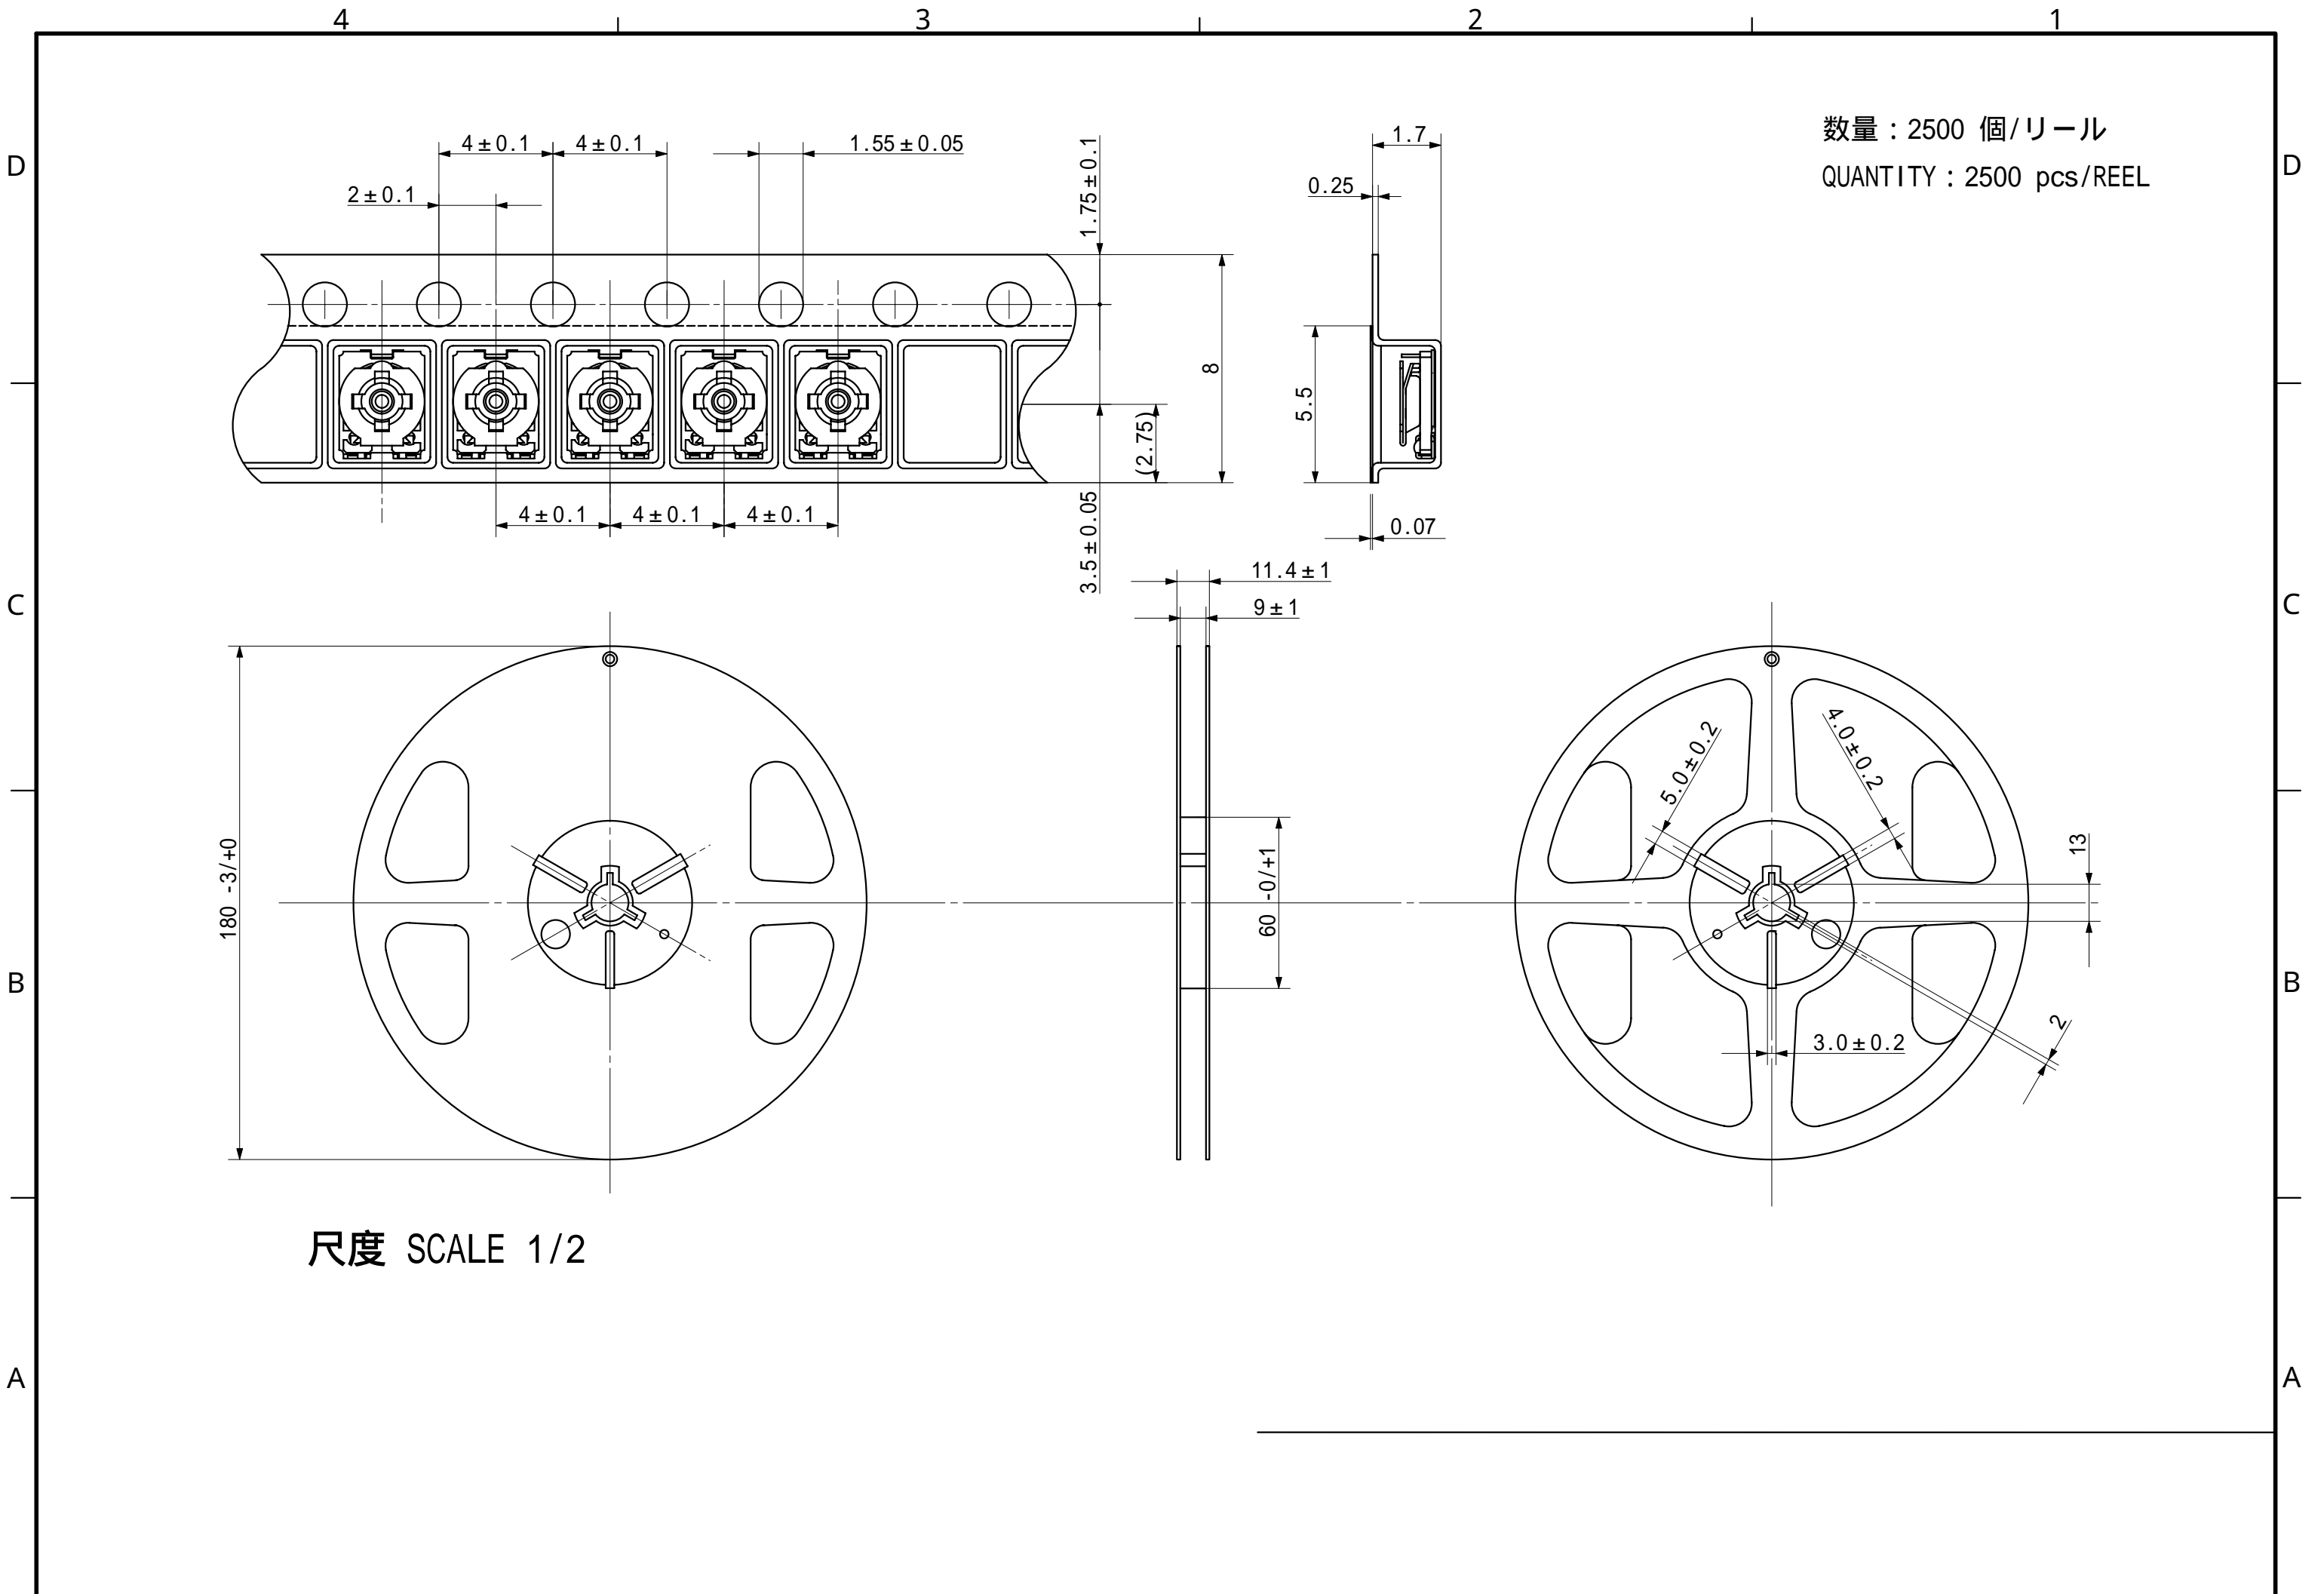

4 3 2 1

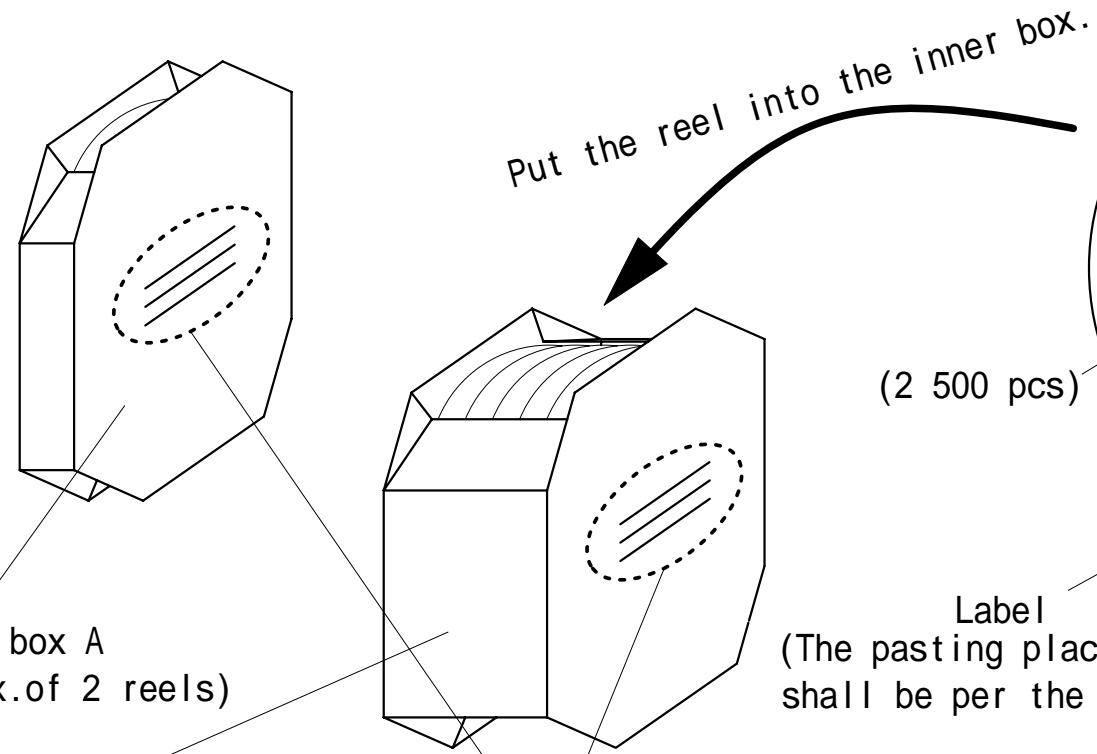

| | |
|----------|--------------|
| PART No. | |
| HDK TYPE | VG039NCHXT |
| VALUE | ohms |
| QUANTITY | 2500pcs RoHS |
| DATE | |
| Lot.No. | |

Label description
 PART No. : Per customer's directions
 VALUE : Indication of the resistance value (Ex. 100)
 QUANTITY : Label for the reel
 LEADLESS SOLDER : "RoHS"
 Date : Indication of taping date(Ex. 02.4.18)
 Lot.No. : Indication of HDK manufacturing lot No.(Ex. Q-16-5-1)

Inner box A
(A max.of 2 reels)


Inner box B
(A max.of 6 reels)

Type name, Resistance value and quantity are filled in. Note 4.


Packaging Specification

| | Number of the reels put in | Total Quantity of the products |
|-------------|----------------------------|--------------------------------|
| Inner box A | A max of 2 reels | 5 000 pcs. max. |
| Inner box B | A max of 6 reels | 15 000 pcs. max. |

| | Number of the reels put in | Total Quantity of the products | Size (W*L*H) (Unit : mm) |
|-------------|----------------------------|--------------------------------|-----------------------------|
| Outer box a | A max of 6 reels | 15 000 pcs.max. | 290*210*90 |
| Outer box b | A max of 12 reels | 30 000 pcs.max. | 505*210*90 |
| Outer box c | A max of 24 reels | 60 000 pcs.max. | 400*220*180 |
| Outer box d | A max of 48 reels | 120 000 pcs.max. | 400*220*330 |
| Outer box e | A max of 30 reels | 75 000 pcs.max. | 390*210*225 |

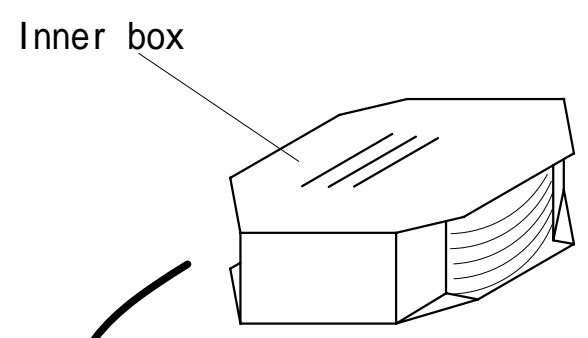

Put the inner box into the outer box.

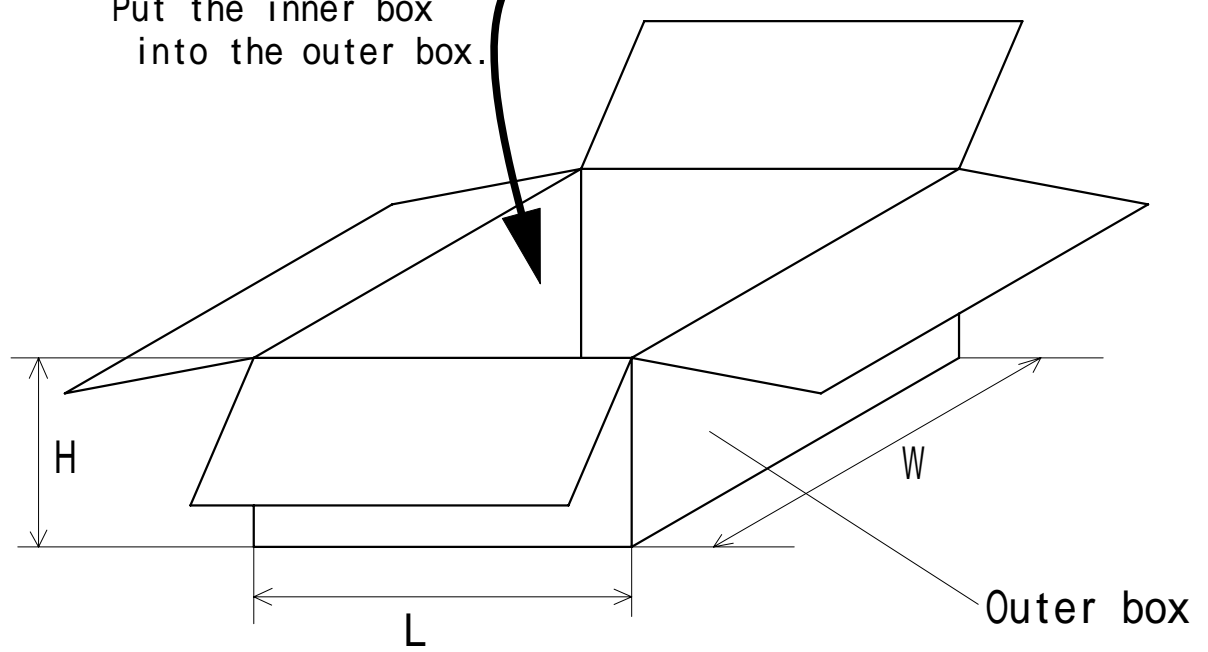

- Note 1- Glue the label on the reel (The gluing position is per the drawing.)
- Note 2- Cushion material is to be put in to fill the empty space when the number of the reels in an inner box does not reach 2 or 6 respectively.
- Note 3- Cushion material is to be put in to fill the empty space when the total quantity in the outer box does not reach 15 000 , 30 000 , 60 000, 75 000, or 120 000 pcs. respectively.
- Note 4- Type name, resistance value and quantity shall be written on a inner box.

Example : VG039NCHXT
 B 1 k ohm
 15 000

4 3 2 1