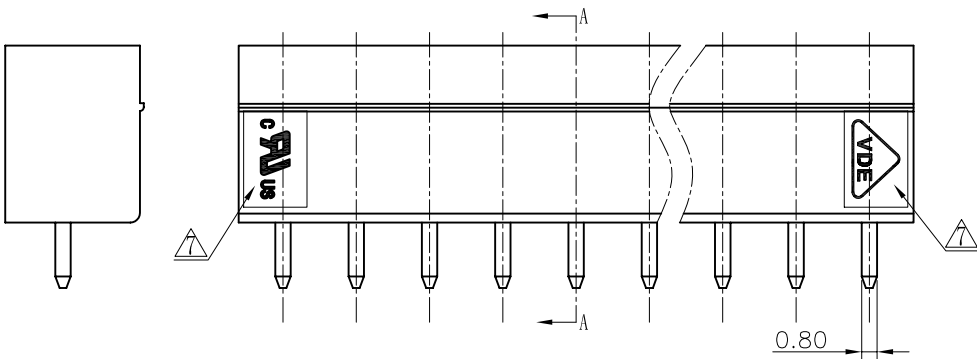
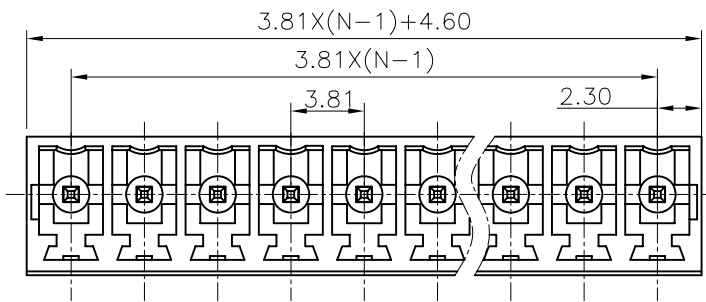


Notes:

1. Pitch:3.81mm , Poles:2-24P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0

2	15EDGVC-Pin header	1002B00060 (H)	XX	Brass	Automatic assembly
2	15EDGVC-Pin header	1002B00010 (H)	XX	Brass	Manual assembly

1	15EDGVC-3.81-Housing	1003A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO: Zhuwm	DATE 07/24/04	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
MFO		MFO	DATE		
APPVL		APPVL	DATE		
MATERIAL :		NAME		15EDGVC-3.81-XXP-1Y-00A(H)	
ANGLES ± 1°		G.E :		DRAWING NO. 15EDGVC-3.81-E03	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	