



3528 Brilliant Red-Yellow Green Dual-color P-LCC-4 Surface Mount LEDs

P/N: LLS-3528SURSYGC-FJ

Package Dimensions

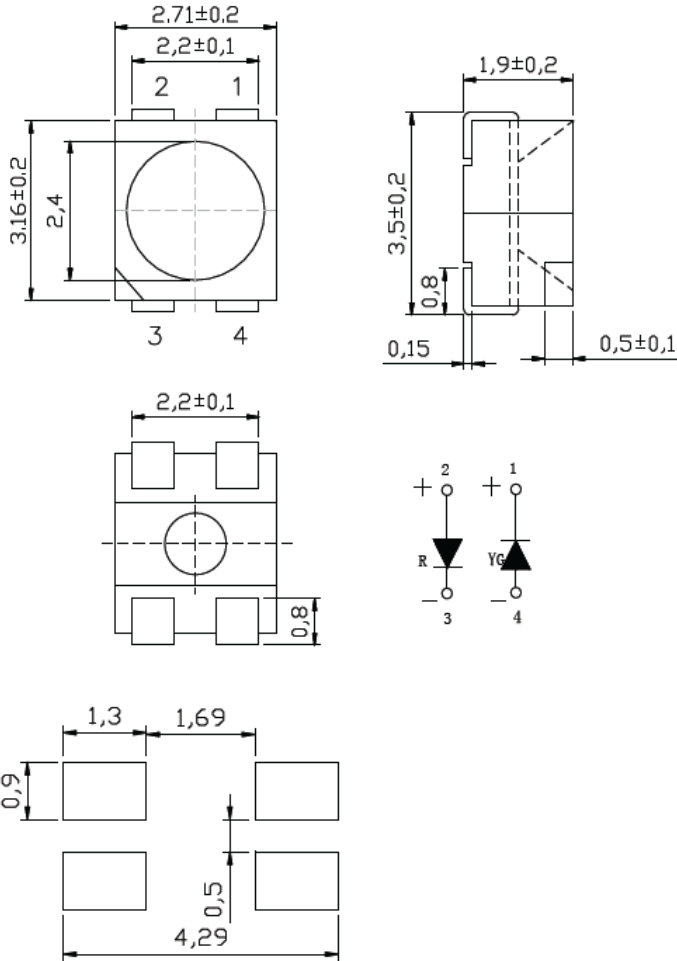

Recommended Soldering Patter

NOTES:

1. All dimensions are in millimeter [unit];
2. Tolerance is ± 0.1 mm (0.004") unless other specified.
3. Specifications are subject to change without notice.

Features

- 3.5*2.8*1.9mm Outline Dimensions (L / w / h): 3.1*2.7*1.9mm
- Luminous color and colloid: Brilliant Red-Yellow Green / water colloid
- Environmental protection products Complied with ROHS Directive
- Moisture sensitivity level (MSL) : 2a-3 levels
- EIA standard packaging
- Suitable for SMT automatic production
- Suitable for reflow soldering process.

·Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Maximum	Unit
Power Dissipation	R	50	mW
	YG	50	
Continuous Forward Current	R	20	mA
	YG	20	
Peak Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	R	80	mA
	YG	80	
Reverse Voltage	V _R	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	T _{opr}	-20 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +85	°C
Lead soldering temperature/time	TSOL	260°C≤6S	/

* Note: Pulse width≤0.1ms, Duty≤1/10

·Electrical/Optical Characteristics (Ta=25°C)

Item	Symbol	Color	Condition	Min.	Typ.	Max	Unit
Luminous intensity	I _v	R	I _F =20mA	200	--	400	mcd
		YG	I _F =20mA	50	--	100	
Diminant wavelength	λ _d	R	I _F =20mA	620	---	630	nm
		YG	I _F =20mA	570	---	575	
Peak wavelength	λ _P	R	I _F =20mA	--	625	--	nm
		YG	I _F =20mA	--	575	--	
Half wavewidth	Δλ	R	I _F =20mA	--	35	--	nm
		YG	I _F =20mA	--	20	--	
Forward Voltage	V _F	R	I _F =20mA	1.8	--	2.4	V
		YG	I _F =20mA	1.8	--	2.4	
Viewing Angle	2θ _{1/2}		I _F =20mA	---	120	---	deg
Reverse Current	I _R		V _R =5V	---	--	5-	uA

·Brightness grading

Bin code	Min	Max	Unit	Test condition
D1	50	80	mcd	IF=20mA
D2	80	120		
D3	120	150		
D9	350	400		
E1	400	450		

·Voltage grading


Bin code	Min	Max	Unit	Test condition
N12-7	1.8	2.0	V	IF=20mA
N12-8	2.0	2.2		
N12-9	2.2	2.4		

·Wavelength grading


Bin code	Min	Max	Unit	Test condition
HR02	620	625	nm	IF=20mA
HR03	625	630		
HYG05	570	572.5		
HYG06	572.5	575		

Typical Electro-Optical Characteristics Curves


Forward Current VS Forward Voltage

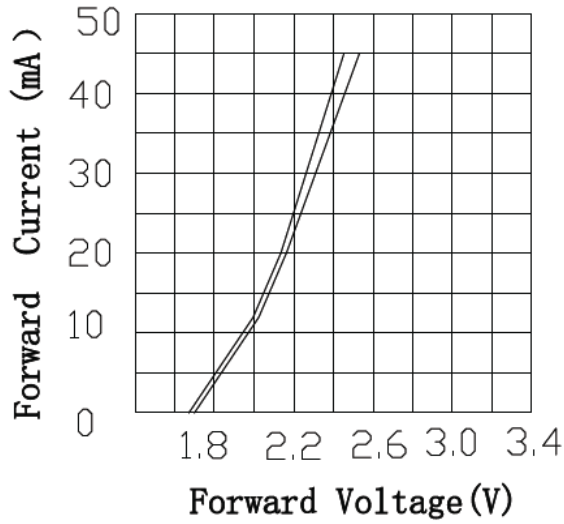



Forward Current VS. Relative Intensity

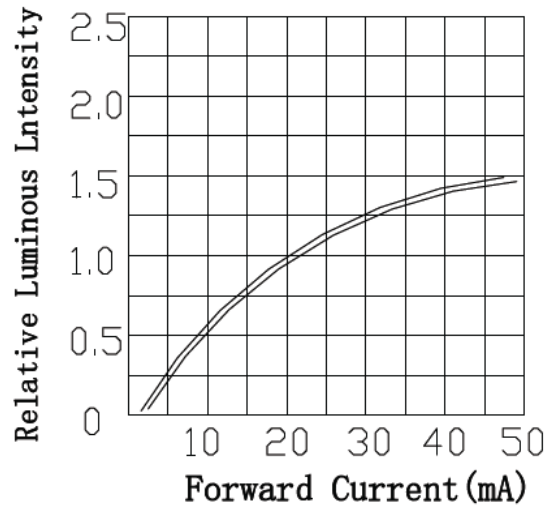

Ambient Temperature VS Forward Current

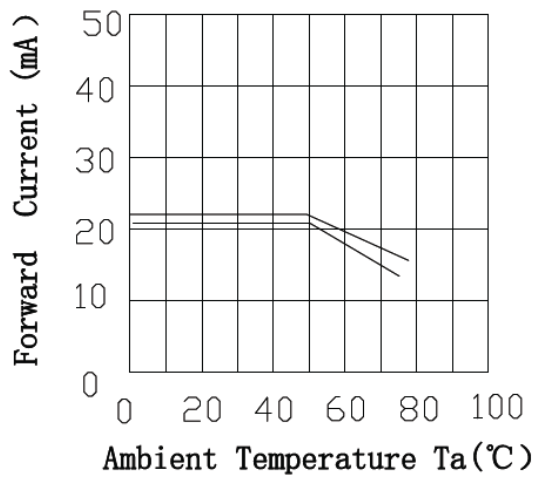

Ambient Temperature VS. Relative Intensity

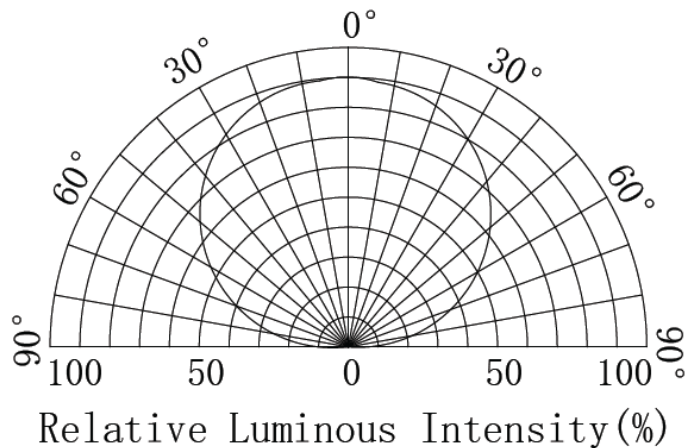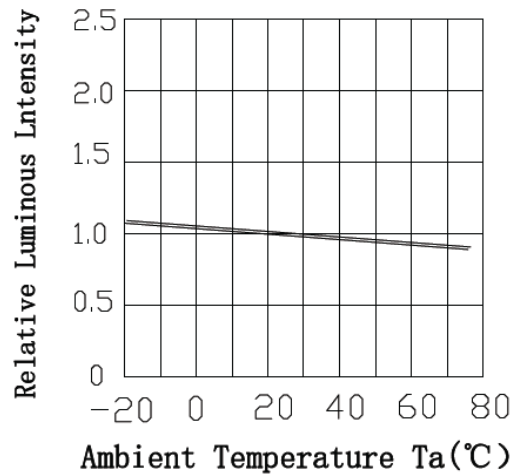

·Reliability test items and conditions


Test Items	Ref.standard	Test Condition	Number of tests	Failure determination standard	Number of failure LEDs (PCS)
Moisture proof grade	JEITA ED-4701 300.301	1. The maximum temperature of reflow soldering=260 °C,10 seconds, two reflow soldering. 2. Storage conditions before reflowing soldering: 30 °C, relative humidity=70%,	-	# 1	0/22
Welding reliability (Lead free reflow)	JEITA ED-4701 303 303A	Maximum reflow temperature=245 ± 5 °C, 5 seconds (lead-free reflow)	-	# 2	0/22
thermal cycling	JESD22-A104	-40 °C for 30 minutes to 25 °C for 5 minutes~ 100 °C for 30 minutes~25 °C for 5 minutes	300 cycles	# 1	0/22
Thermal Shock	JESD22-A106	-35 °C for 15 minutes Conversion time: 3 minutes 85 °C for 15 minutes	300 cycles	# 1	0/22
High temperature storage	JESD22-A103	Ta=100°C	1000hours 300 cycles	# 1	0/22
Low temperature storage	JESD22-A119	Ta=-40°C	1000hours 300 cycles	# 1	0/22
Normal temperature aging	JESD22-A108	Ta=25°C IF=20mA	1000hours 300 cycles	# 1	0/22

·Failure Criteria

Standard	Project	Test Condition	Failure criteria
#1	Forward voltage (VF)	IF=20mA	>U.S.L*1.1
	Light intensity (IV)	IF=20mA	<L.S.L*0.7
	Reverse current (IR)	VR=5V	>U.S.L*2.0
# 2	Welding reliability	/	The proportion of solder paste covering pads is less than 95%

·Packaging

Belt and disk dimensions

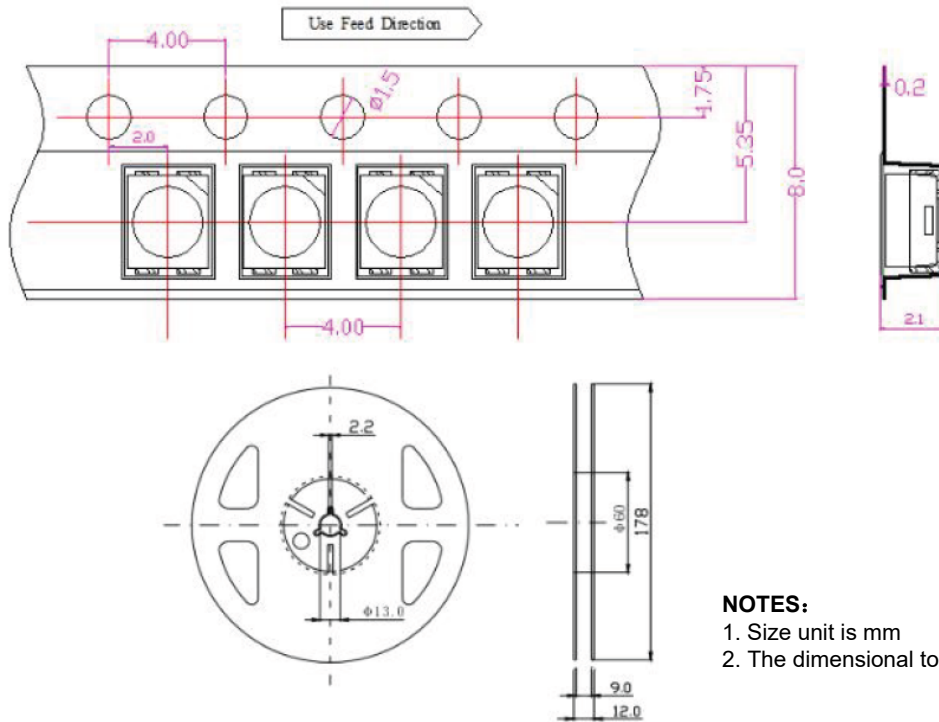

- NOTES:**
1. Size unit is mm
 2. The dimensional tolerance is $\pm 0.1\text{mm}$

Moisture Resistant Packaging




-Guideline for soldering


1. Hand Soldering

Manual welding is recommended only for repair and heavy industry situations. A soldering iron of less than 30W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 300°C while soldering. Each terminal of the LED is to go for less than 3 second and for one time only. Be careful because the damage of the product is often started at the time of the hand soldering.

2. Reflow Soldering: Use the conditions shown in the under Figure of Pb -Free Reflow Soldering

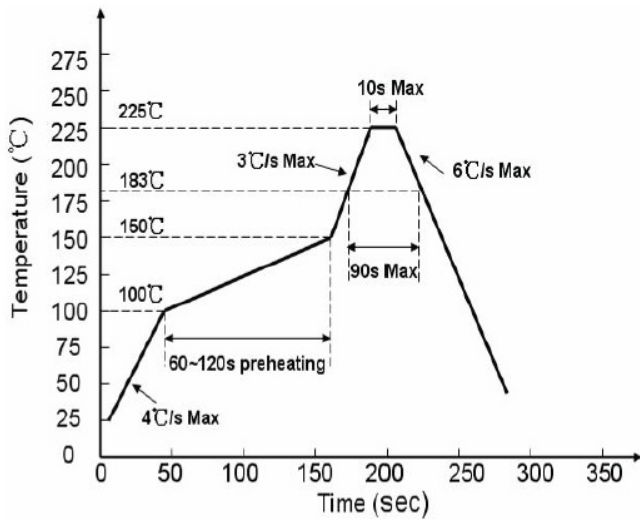

有铅制程 Lead process

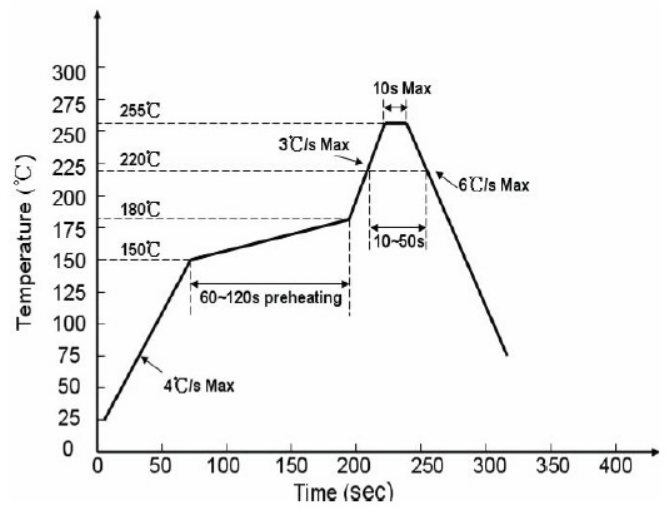

无铅制程 lead free

Reflow soldering should not be done more than two times.

Stress on the LEDs should be avoided during heating in soldering process.

After soldering, do not deal with the product before its temperature drop down to room temperature.

- Cleaning

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30°C for 3 minutes or 50°C for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pretest should be done to confirm whether any damage to LEDs will occur.

Note: This general guideline may not apply to all PCB designs and configurations of all soldering equipment. The technique in practice is influenced by many factors, it should be specialized base on the PCB designs and configurations of the soldering equipment.

·Storage

Moisture proof and anti-electrostatic package with moisture absorbent material is used, to keep moisture to a minimum. Before opening the package, the product should be kept at 30°C or less and humidity less than 60% RH and be used within a year.

After opening the package, the product should be stored at 30°C or less and humidity less than 10%RH and be soldered within 168 hours (7 days). It is recommended that the product be operated at the workshop condition of 30°C or less and humidity less than 60%RH.

If the moisture absorbent material has fade away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition: $(60\pm 5)^\circ\text{C}$ for 24 hours.

·Static Electricity


Static electricity or surge voltage damages the LEDs. Damaged LEDs will show some unusual characteristic such as the forward voltage becomes lower, or the LEDs do not light at the low current. Even not light.

All devices, equipment and machinery must be properly grounded. At the same time, it is recommended that wrist bands or anti-electrostatic gloves, anti-electrostatic containers be used when dealing with the LEDs.

·Design Consideration

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.


It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current through the LEDs may vary due to the variation in Forward Voltage (VF) of the LEDs. In the worst case, some LED may be subjected to stresses in excess of the Absolute Maximum Rating.

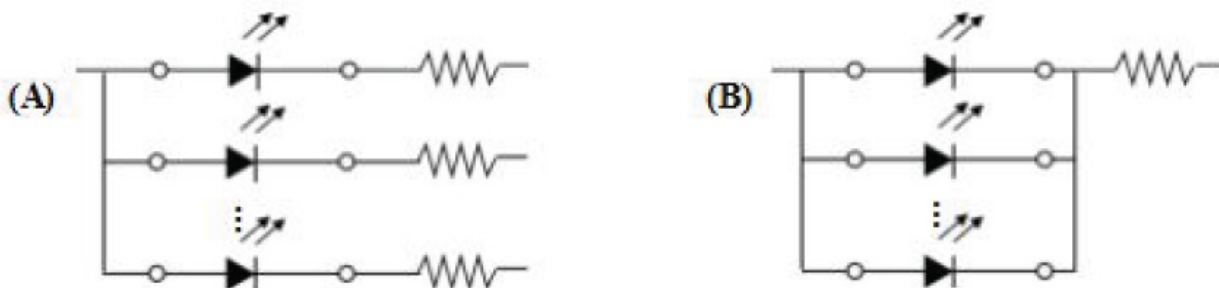

Thermal Design is paramount importance because heat generation may result in the Characteristics decline, such as brightness decreased, Color changed and so on. Please consider the heat generation of the LEDs when making the system design.

·Others

When handling the product, touching the encapsulate with bare hands will not only contaminate its surface, But also affect on its optical characteristics. Excessive force to the encapsulate might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

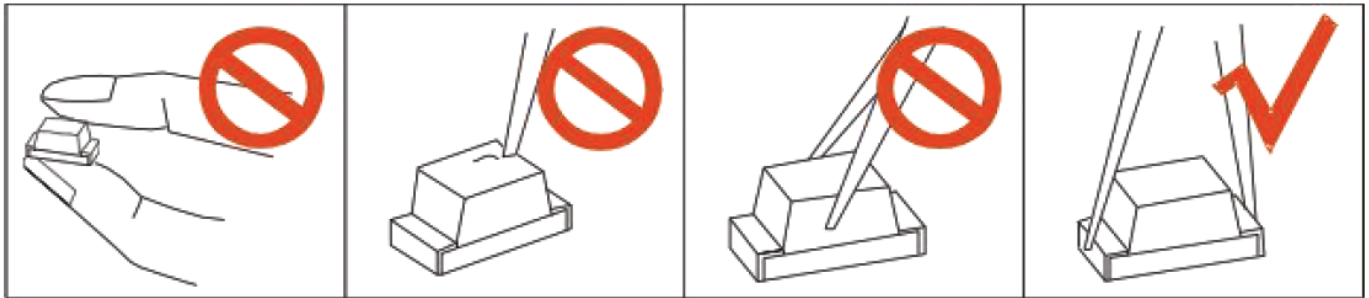

The epoxy resin of encapsulate is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

·Safety Advice for Human Eyes

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.