

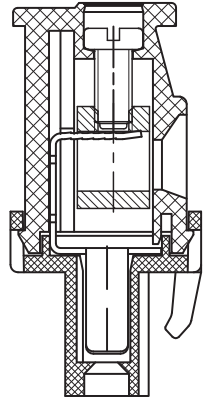
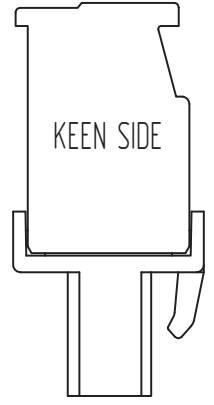
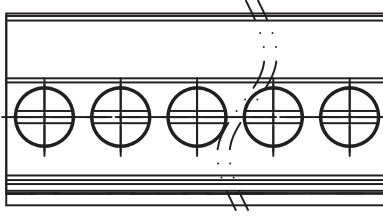


FILE:

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/09/25

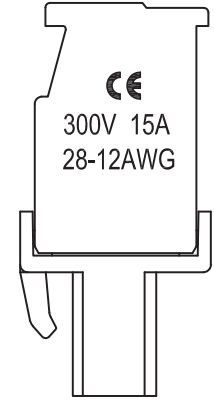


SECTION:A-A

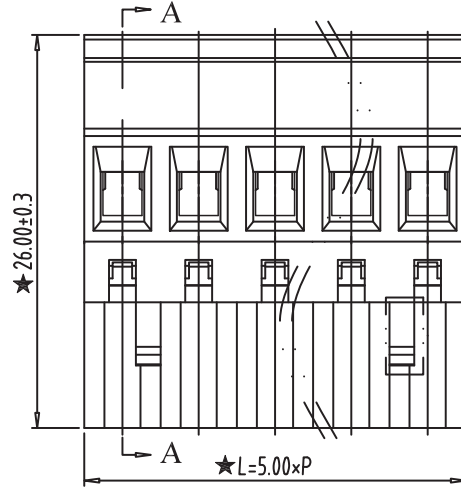

NOTES:

1. Rating:300V 15A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. Screw Torque Vlaue:0.4N.m
6. Suitable Electric Wire: 28~14AWG
7. "★" is the important dimension.

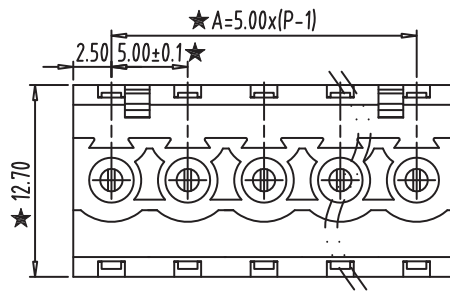

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to 100	over 100 to 150	over 150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5


ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/09/25	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	2:1
APP.		DATE		NAME	KSE-2EDGKA-5.0-XXP
				DWGNO.	



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/09/25

NOTES:

1. Rating:300V 15A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. Screw Torque Value:0.4N.m
6. Suitable Electric Wire: 28~14AWG
7. "★" is the important dimension.

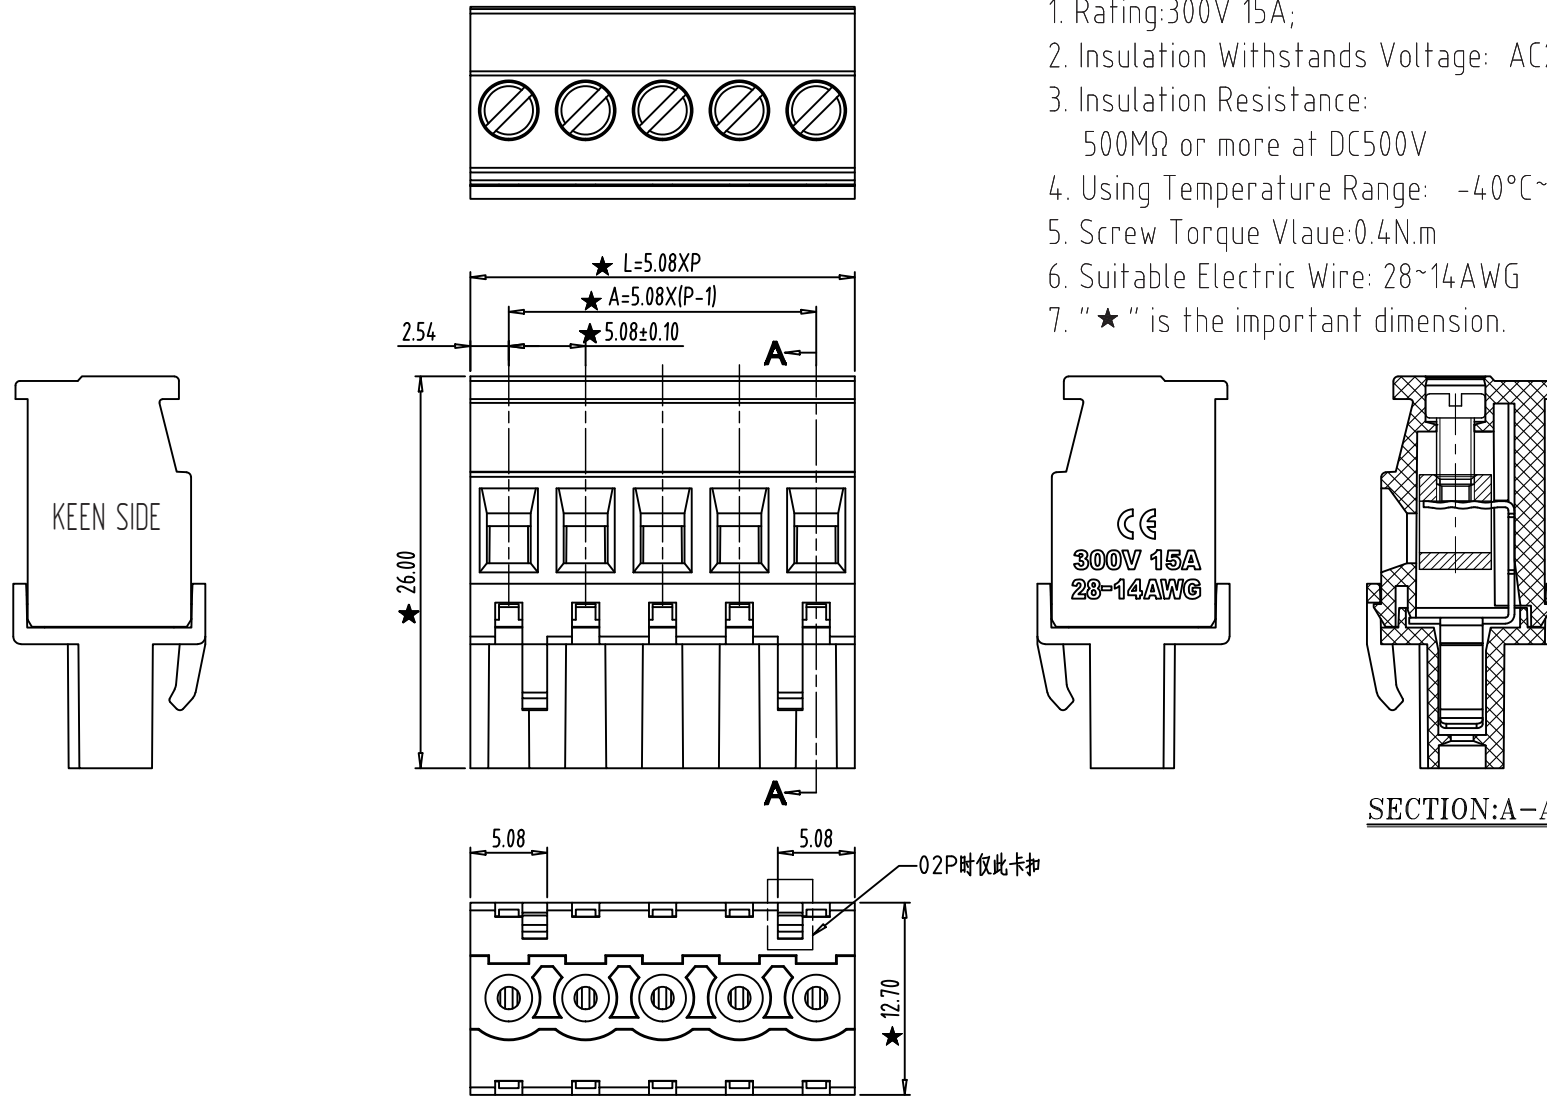

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/09/25	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	2:1
APP.		DATE		NAME	KSE-2EDGKA-5.08-XXP
				DWGNO.	



Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500		to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10			to 100	to 150	to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85		±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3		0.2	0.3	0.5