


Material
 Screw: M4, Steel, Zn plated
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0, Black

Electrical
 Rated voltage: 600V
 Rated current: 40A
 Wire range: 18~10AWG 6mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

L-KLS2-48 C-13.0-XXP-A

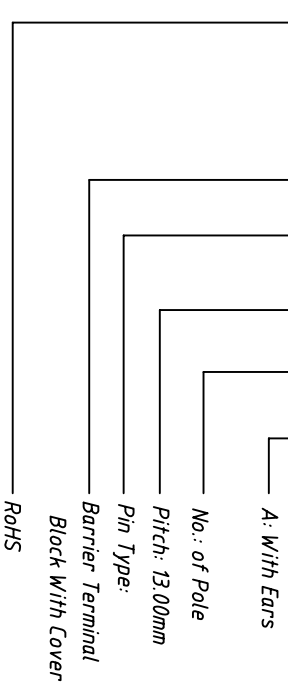

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°		UNITS
			SHEET		OF	Barrier TERM BLOCK 13.0MM	
Draw by: Date			2015-09-01		KLS P/N:		
Check by: Date			2015-09-15		KLS2-48C-13.0-XXP-X		
SCALE						KLS ELECTRONIC CO., LTD.	