

## URB-YMD-10W and URA-YMD-10W Series

10W, 1500VDC Isolated voltage regulator single/positive/negative output DC-DC module power supply

- ◆ Ultra-wide input voltage range: 4:1
- ◆ Low standby power consumption: 0.15W(typ)
- ◆ Low ripple noise: 75mV(typ)
- ◆ Input undervoltage protection
- ◆ Output short-circuit protection (self-recovery)



*This series of module power supply is suitable for the power supply circuit where the input voltage changes greatly and the input and output must be isolated. Its ultra-wide input voltage range (4:1), high stability of the output voltage, low ripple noise, efficient and reliable characteristics, especially suitable for industrial control system power supply, communication system power supply, power monitoring system power supply, instrumentation power supply and other power systems.*

### Selection list

Model number	Nominal value of input voltage	Input voltage range	Output voltage range	Output rated load	Full-load efficiency (%_typ)	Maximum capacitive load (μF)
URB2403YMD-10W	24	9.0-36	3.3V	2500mA	78	4700
URB2405YMD-10W			5.0V	2000mA	83	3300
URB2409YMD-10W			9.0V	1110mA	85	1000
URB2412YMD-10W			12V	833mA	87	820
URB2415YMD-10W			15V	666mA	88	680
URB2424YMD-10W			24V	416mA	89	330
URA2405YMD-10W			±5.0V	±1000mA	81	±1500
URA2412YMD-10W			±12V	±416mA	86	±470
URA2415YMD-10W			±15V	±333mA	87	±330
URA2424YMD-10W			±24V	±210mA	88	±150
URB4803YMD-10W	48V	18-75V	3.3V	2500mA	78	4700
URB4805YMD-10W			5.0V	2000mA	83	3300
URB4809YMD-10W			9.0V	1110mA	85	1000
URB4812YMD-10W			12V	833mA	87	820
URB4815YMD-10W			15V	666mA	88	680
URB4824YMD-10W			24V	416mA	89	330

URA4805YMD-10W			±5.0V	±1000mA	81	±1500
URA4812YMD-10W			±12V	±416mA	86	±470
URA4815YMD-10W			±15V	±333mA	87	±330
URA4824YMD-10W			±24V	±210mA	88	±150

### Product characteristics


item	Working condition	Min	Typ	Max	unit
Input current (full/empty)	24V nominal input series	--	496/5	--	mA
	48V nominal input series	--	248/3	--	
Starting voltage	24V nominal input series	--	--	9	V
	48V nominal input series	--	--	18	
Start-up time	Nominal input voltage @ Full load (resistive load)	--	10	--	ms
Undervoltage shut off	24V nominal input series	--	7.0	--	V
	48V nominal input series	--	15	--	
Output voltage	Positive output @0-100% load	-2	±1	+2	%
accuracy	Negative output @0-100% load, balancing load	-3	±1.5	+3	
Linear adjustment rate	Positive output @ full load, Vin_min to Vin_max	-0.5	±0.3	+0.5	
	Positive output @ full load, Vin_min to Vin_max	-0.75	±0.5	+0.75	
Load adjustment rate	Positive output @ nominal input, 10%-100% load	-1.0	±0.5	+1.0	
	Negative output @ nominal input, 10%-100%	-1.5	±0.75	+1.5	
Dynamic response deviation	Nominal input @ load 50%-75%-50% variation	--	±5	±8	μs
Dynamic recovery time	Nominal input @ load 50%-75%-50% variation	--	300	500	
Ripple & Noise	20MHz bandwidth@Vin_nom,100%load	--	75	150	mVp-p
Remote output ON/OFF	Module output on (ON)	CTRLSuspended or connected high level (2V-Vin)			
	The module output is off (OFF)	CTRLConnect GND or low level (0-0.5V)			
	Input current when turned off	--	2	--	mA
Short circuit protection		可持续, 自恢复			
Overcurrent protection	Vin@Vin_min	110	--	150	%
Coefficient of temperature drift	Nominal input @100% load	--	±0.03		%/°C
Insulation voltage	input-output, 60 seconds @ leakagecurrent≤1mA	1500	--	1700	VDC
Insulation resistance	input-output, Test voltage 500VDC	1000	--	--	MΩ
Isolation capacitance	input-output, 100KHz/0.1V	--	2200	--	pF
Switching frequency	100%load @Vin_nom	--	300	--	KHz
Operating ambient temperature	The temperature derating requirement is met	-40	--	+85	°C
Product working temperature rise	100% load @Vin_nom,Ta=25°C	--	45	--	
Storage temperature		-55	--	+125	
Storage humidity	non-condensing	--	--	95	%RH

MTBF	MIL-HDBK-217F@25℃	1000	--	--	KHours
Welding temperature	Hand welding	370±10℃@3 ~ 5Sec			
	Wave soldering welding	260±10℃@5 ~ 10Sec			
Hot swap		nonsupport			
Cooling mode		Natural air cooling			
Housing material		Ferrous metal case			



### Product EMC characteristics

EMI	Conduction disturbance	CISPR32/EN55032 CLASS B		
	Radiation disturbance	CISPR32/EN55032 CLASS B		
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact±4KV	Perf.Criteria B
	Radiation immunity	IEC/EN61000-4-3	10V/m	Perf.Criteria A
	Pulse group immunity	IEC/EN61000-4-4	±2KV	Perf.Criteria B
	Surge immunity	IEC/EN61000-4-5	line to line ±2KV	Perf.Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-6	3Vrms	Perf.Criteria A
	Voltage dips, drops and short interruption immunity	IEC/EN61000-4-29	0, 70%	Perf.Criteria B
Note: Refer to EMC recommended circuit test				

### Product Characteristic Curve 1 (Temperature derating and conversion efficiency)

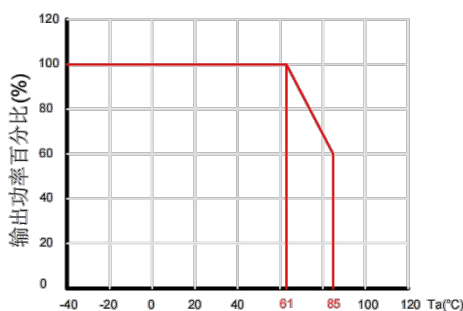

Temperature derating curve

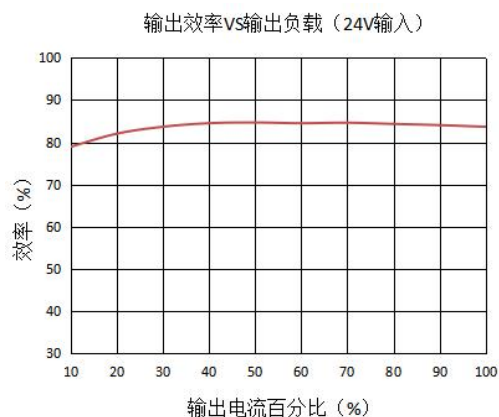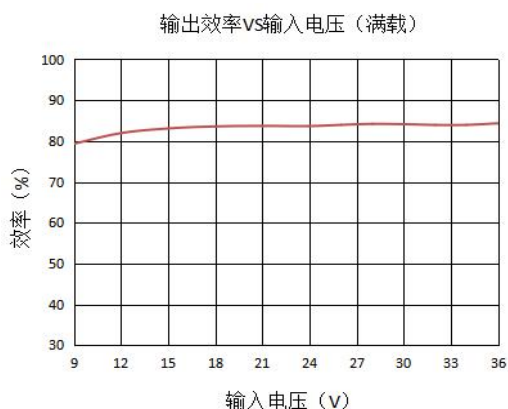

## Precautions for use

### 1、Additional input capacitance considerations:

There are a variety of interference noises in the input line of the power supply. The frequency is high, the duration is short, but the peak value is very high. In order to make the power supply work stably and reliably, it is usually necessary to add a suitable absorption capacitance at the input end. In some cases, the lead between the power supply and the power supply on the PCBA board is very long, then it is necessary to connect the filter capacitor near the input pin of the power supply to achieve the effect of impedance matching. The greater the interference noise, the longer the line, the greater the required external capacitance value. We recommend the use of high frequency and low resistance electrolytic capacitors, general application, can be selected according to the recommended value of the "Design reference chapter".

### 2, the consideration of the output filter capacitance:

In the actual application circuit, the load size of the power supply varies, usually accompanied by large or small changes. In order to adapt it to different use occasions and load requirements, and work more stably and reliably, it is necessary to add a suitable capacitor to the output end of the power supply. On the one hand, to further reduce the output ripple and noise; On the other hand, the output voltage amplitude fluctuation caused by load jump is reduced by applying output capacitance to make the output voltage more stable. However, the output end can not add too large capacity capacitance, the larger the output capacitance, the power supply needs to start the instantaneous current provided by the power supply end will increase, and may even cause its output voltage can not be established; In addition, the capacitance value at the output end is too large, and the power supply is prone to output overshoot when starting. Therefore, in order to make the power supply work more stably and reliably, the output capacitance should be reduced as much as possible when the output voltage fluctuation amplitude caused by the load jump meets the requirements. The maximum capacitive load in the selection list only means that the power supply can start normally when the total capacitance of its output is within this value, and we do not recommend it. We recommend the use of high frequency and low resistance electrolytic capacitors, recommended values please see the "Design reference chapter".

### 3. Prevent hot swap test or use of the power module:

When the power supply is not disconnected, inserting the power supply into or removing it from the circuit is a hot swap operation. The power supply does not support hot swap during use or testing. Because in the hot swap process, due to the current mutation will produce high voltage spike, it may cause damage; In another case, a mechanical switch is connected in series between the power supply and the input end of the power supply product, and the power supply is controlled on and off by the mechanical switch. The mechanical switch will also produce high voltage spikes during on-off operation, which may also cause damage to the power supply. Power supply products in the test or use process, any operation that will produce high voltage spikes should not be ignored, need to take measures to prevent high voltage spikes directly added to its input, refer to the "Design reference chapter".

### 4, input high transient voltage peak protection:

If the product is used in an environment with harsh electromagnetic interference, for example, the input end of the product shares the power supply with the inductive load, or the power supply end

When the current loop is on/off, if not handled properly, there will be a high transient voltage spike in the power supply circuit, this interference is not dealt with, and too high peak voltage enters the product input, which is likely to cause product damage. The suppression of high voltage spikes is very important to ensure the stable and reliable use of the product. Commonly used transient voltage suppression devices are varistor (MOV), transient voltage suppression diode (TVS) and so on. Different devices have advantages and disadvantages, please choose according to the use of the occasion and requirements, refer to the "Design reference chapter".

### 5, positive and negative output load balance requirements:


The actual load of the positive and negative output products usually has an imbalance between the two loads. In this case, the voltage of the negative output will change with the change of the load of the two channels. When the main load is constant, the negative output voltage will increase with the decrease of the load and decrease with the increase of the load. When the negative output load is constant, the negative output voltage decreases with the decrease of the positive output load and increases with the increase of the positive output load. If the positive output load is much smaller than the negative output load, it will even cause the product to not work properly. In practical applications, it is necessary to fully consider whether the extreme situation of the two-way load meets the requirements, and improve the balance of the two-way load as much as possible to make the product work more stable and reliable.

### 6, input polarity and output power expansion:

The input end of the product has no anti-reverse protection, please note: the input polarity will cause damage to the product when in use. To achieve anti-reverse or non-polar use without damaging the product, a diode or rectifier bridge can be connected in series at the input end, refer to the "Design Reference section"; In addition, the product does not support output parallel to achieve output power expansion, please choose our higher power level products.

## Design reference

### 1、Application circuit:

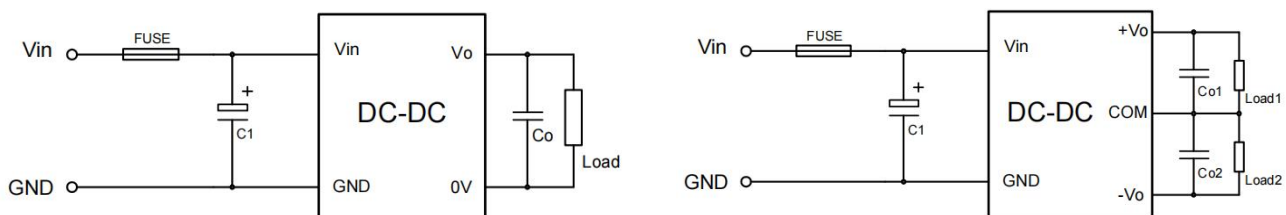


Vin	C1	Vo	Co	Vo	Co/Co1/Co2
24V	470uF/50V	3.3V	470uF/10V	24V	100uF/35V
48V	220uF/100V	5V	470uF/16V	±5V	±220uF/16V
		9V	330uF/25V	±12V	±100uF/25V
		12V	220uF/25V	±15V	±100uF/35V
		15V	220uF/25V	±24V	±100uF/50V


External capacitance values (Table 1)

Note: The input and output capacitors are recommended to use high-frequency and low-resistance electrolytic capacitors, whose capacity values can be referred to (Table 1), and the output capacitors can also use MLCC capacitors. The external capacitance should be as close as possible to the input and output pins of the product; In addition to the use of high-frequency electrolytic capacitors, a 0.1uF chip capacitor is added.

2、 Input and output capacitors are recommended to use high-frequency and low-resistance electrolytic capacitors, whose capacity values can be referred to (Table 1), and output capacitors can also use MLCC capacitors. The external capacitance should be as close as possible to the input and output pins of the product; In addition to the use of high-frequency electrolytic capacitors, a 0.1uF chip capacitor is added.

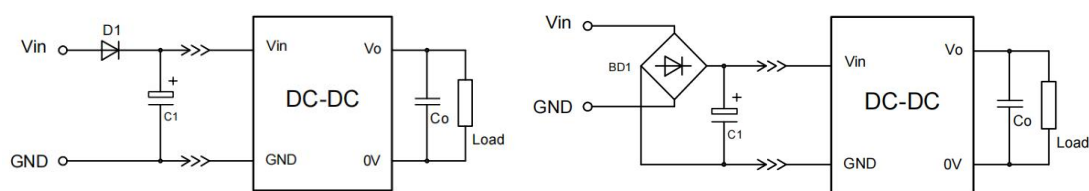


### 3、 EMC Recommended circuit:

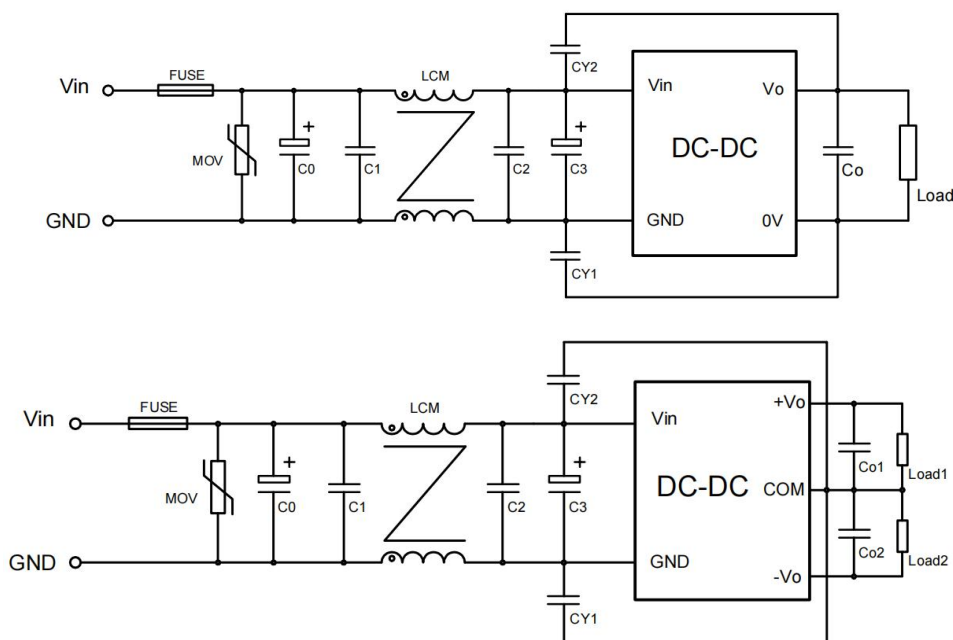

Component parameter description :		
Component code	PA(B)24xxCD-10WN	PA(B)48xxCD-10WN
FUSE	Select according to the actual current size	
MOV	20D470K	14D101K
C0 C3	470uF/50V	220uF/100V
C1 C2	4.7uF/50V	4.7uF/100V
LCM	2.2mH	4.7mH
CY1 CY2	2.2nF/2KV	2.2nF/2KV
Co Co1 Co2	Select according to (Table 1)	

### Appearance size and pin function

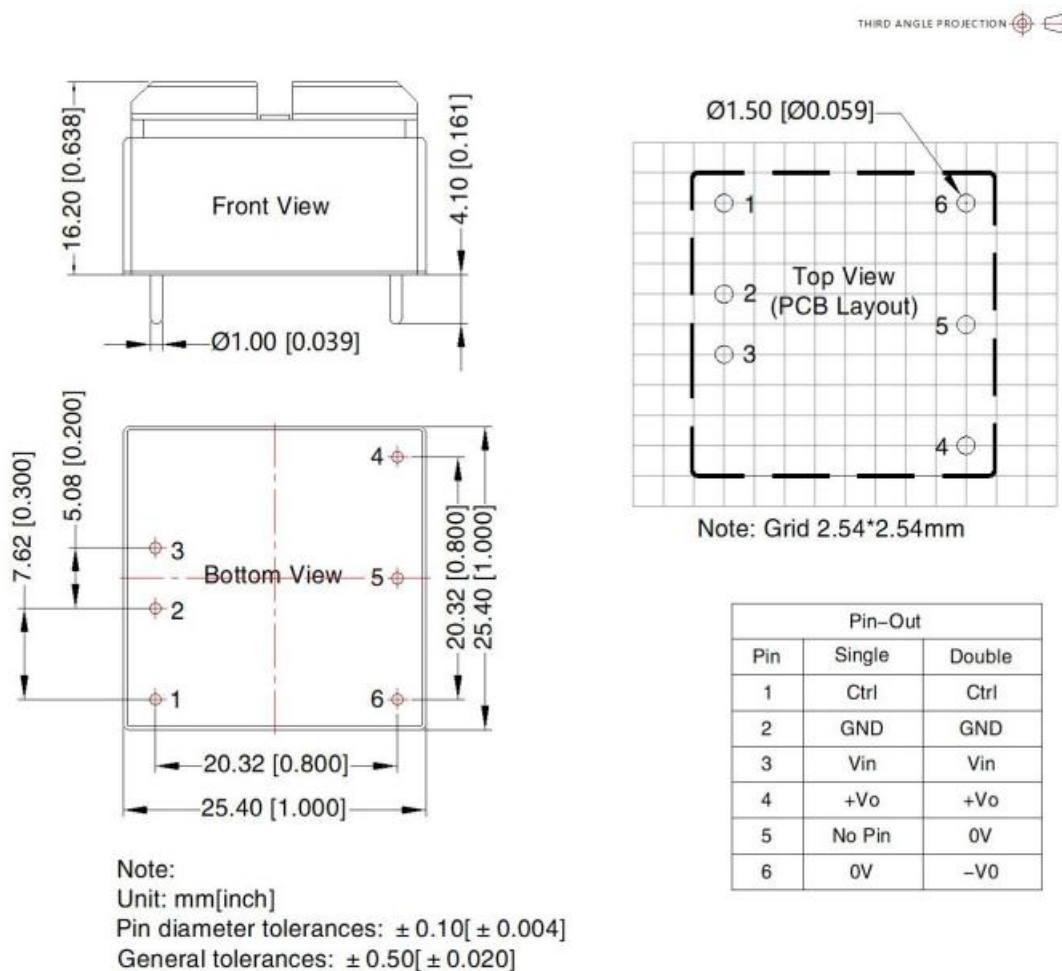

Note:

1. For specific packaging information, please refer to the "Product Shipping Packaging Instructions";
2. If the working load of the product is lower than the minimum load requirements, we cannot guarantee that the product performance can meet all performance indicators;
3. The maximum capacitive load is tested in the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at  $T_a=25\text{ }^{\circ}\text{C}$ , humidity  $<75\%\text{RH}$ , nominal input voltage and rated output load;
5. All index test methods in this manual are based on the company's enterprise standards;
6. Our company can provide product customization, specific circumstances can directly contact our technical personnel;
7. Products related to laws and regulations: see "Product Characteristics", "EMC characteristics";
8. Our products shall be classified and stored in accordance with ISO14001 and relevant environmental laws and regulations after scrapping, and handed over to qualified units.