

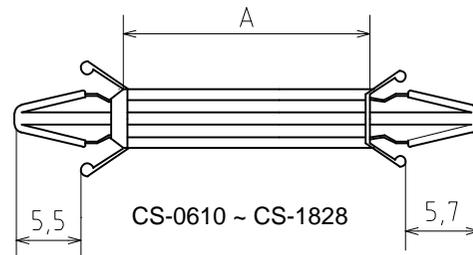


Material: NYLON, approved UL94V-2.
Application: This support can be shaped to lock in the board for PCB / PCB or PCB / CHASSIS.
Installation: quickly by hand without tools.
Usage: drill the hole in PCB, install item in PCB and Chassis.
Features: double side fixation. easily insertion, locking securely.

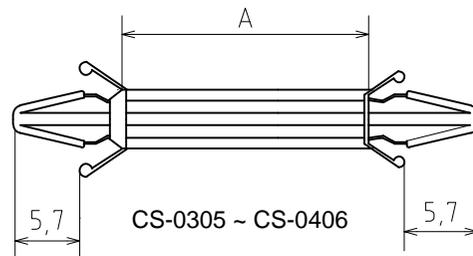

Unit: mm



TYPE	A	PCB		CHASSIS		PACKING, PCS
		Hole	Thick	Hole	Thick	
CS-0305	4.7(3/16")	4	2.5	5	2.5	1000
CS-0406	6.4(1/4")	4	2.5	5	2.5	1000
CS-0610	9.2(3/8")	4	2.5	4.8	2.5	1000
CS-0813	12.4(1/2")	4	2.5	4.8	2.5	1000
CS-1016	15.6(5/8")	4	2.5	4.8	2.6	1000
CS-1219	18.8(3/4")	4	2.5	4.8	2.6	1000
CS-1422	22(7/8")	4	2.5	4.8	2.6	1000
CS-1625	25.2(1")	4	2.5	4.8	2.6	1000
CS-1828	28.3(1-1/8")	4	2.5	4.8	2.6	1000

Order details:
 CS-0406 type meets CS-5 model
 CS-0610 type meets CS-10 model

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 500 to 1000	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 320 to 10	over 10 to 100	over 100 to 150	over 150 to 150	
±0.18	? .20	±0.25	±0.3	±0.35	? .44	±0.60	±0.70	? .85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.		DATE		SIZE A4 UNITS mm	SHEET/OF 1 / 1
CHK.		DATE		SCALE	
APP.		DATE		NAME	CS Series support
				DWGNO.	02